

INDOOR



PERFORMANCE IN MOTION

EXUSTAR is a leading supplier of bicycle, indoor cycling and motorcycle gear. It is our goal to provide a simpler, more convenient, comfortable and efficient riding experience. Since 2002 we've been committed to the development of new technologies and products, continuously innovating and improving. We place top priority on quality and safety, and all our products are thoroughly tested and, where appropriate, certified. In addition to our own Exustar brand, we work closely with other companies on an ODM or OEM basis, helping them to bring their products successfully to the global market.

WWW.EXUSTAR.COM



Exustar Enterprise Co. Ltd.

T e l : +886 (0) 4 2693 7999 F a x : +886 (0) 4 2693 8777 Email: exustar@exustar.com
No.111, Aly. 23, Ln. 430, Wang-Fu St., Dadu Dist., Taichung City 432, Taiwan

Specifications subject to change without notice. All other trademarks are the property of their respective owners.
Copyright © 2023 Exustar Enterprise Co. Ltd. All rights reserved.



2024 INDOOR CATALOGUE

EXUSTAR

EXUSTAR
PERFORMANCE IN MOTION

2024
CATALOGUE





EXUSTAR

PERFORMANCE IN MOTION

TIMELINE

2002

Exustar Co. Ltd. is established.

2003

Carbon fiber products developed.

2005

The Exustar Pedaling System (EPS) developed.

2006

Exustar enters the motorcycle market with a line of leather boots.

2007

Exustar wins top honors at the Innobike design competition. Titanium pedals begin production.

2009

A breakthrough in lightweight pedal design: 176 g/pr.

2010

Exustar sponsored rider (Hsiao Mei Yu) wins a gold medal at the Asian Games.

2011

Exustar cooperates with Garmin to develop the Vector pedal-based power meter.

2012

Company offers road pedals with different levels of binding tension.

2013

Exustar enters the US market. New state-of-the-art pedal manufacturing facility opens in Taiwan.

2014

Development of a line of exceptionally strong and durable indoor pedals—designed for the rigors of fitness centers.

2015

Exustar moves into a purpose-built facility in Taiwan with state of the art CNC-machining facilities.

2016

Exustar takes indoor cycling to a new level with the toughest, most durable and versatile pedals on the market and an indoor shoe designed for fitness centers.

2017

Exustar moves pedal manufacturing to its own production facility.

2018

The heavy-duty ISX Drive System is developed for indoor cycling.

2019

The Exustar motorcycle and bicycle marketing and sales teams merged into one unified unit.

2020

The company launches Triple Layer Cleat Technology, and a line of road pedals with transparent bodies.

2021

Exustar-sponsored rider Eva Lechner competes at the Tokyo Olympics.

2022

Exustar celebrates 20 years in the bicycle industry.

2023


In the face of the pandemic and economic downturn, Exustar continues to push the boundaries of innovation as well as increasing its promotional drive.



Exustar introduces its performance on **indoor cycling.**

EXUSTAR is a leading supplier of bicycle, indoor cycling and motorcycle gear. It is our goal to provide a simpler, more convenient, comfortable and efficient riding experience.

Since 2002 we've been committed to the development of new technologies and products, continuously innovating and improving. We place top priority on quality and safety, and all our products are thoroughly tested and, where appropriate, certified. In addition to our own Exustar brand, we work closely with other companies on an ODM or OEM basis, helping them to bring their products successfully to the global market.

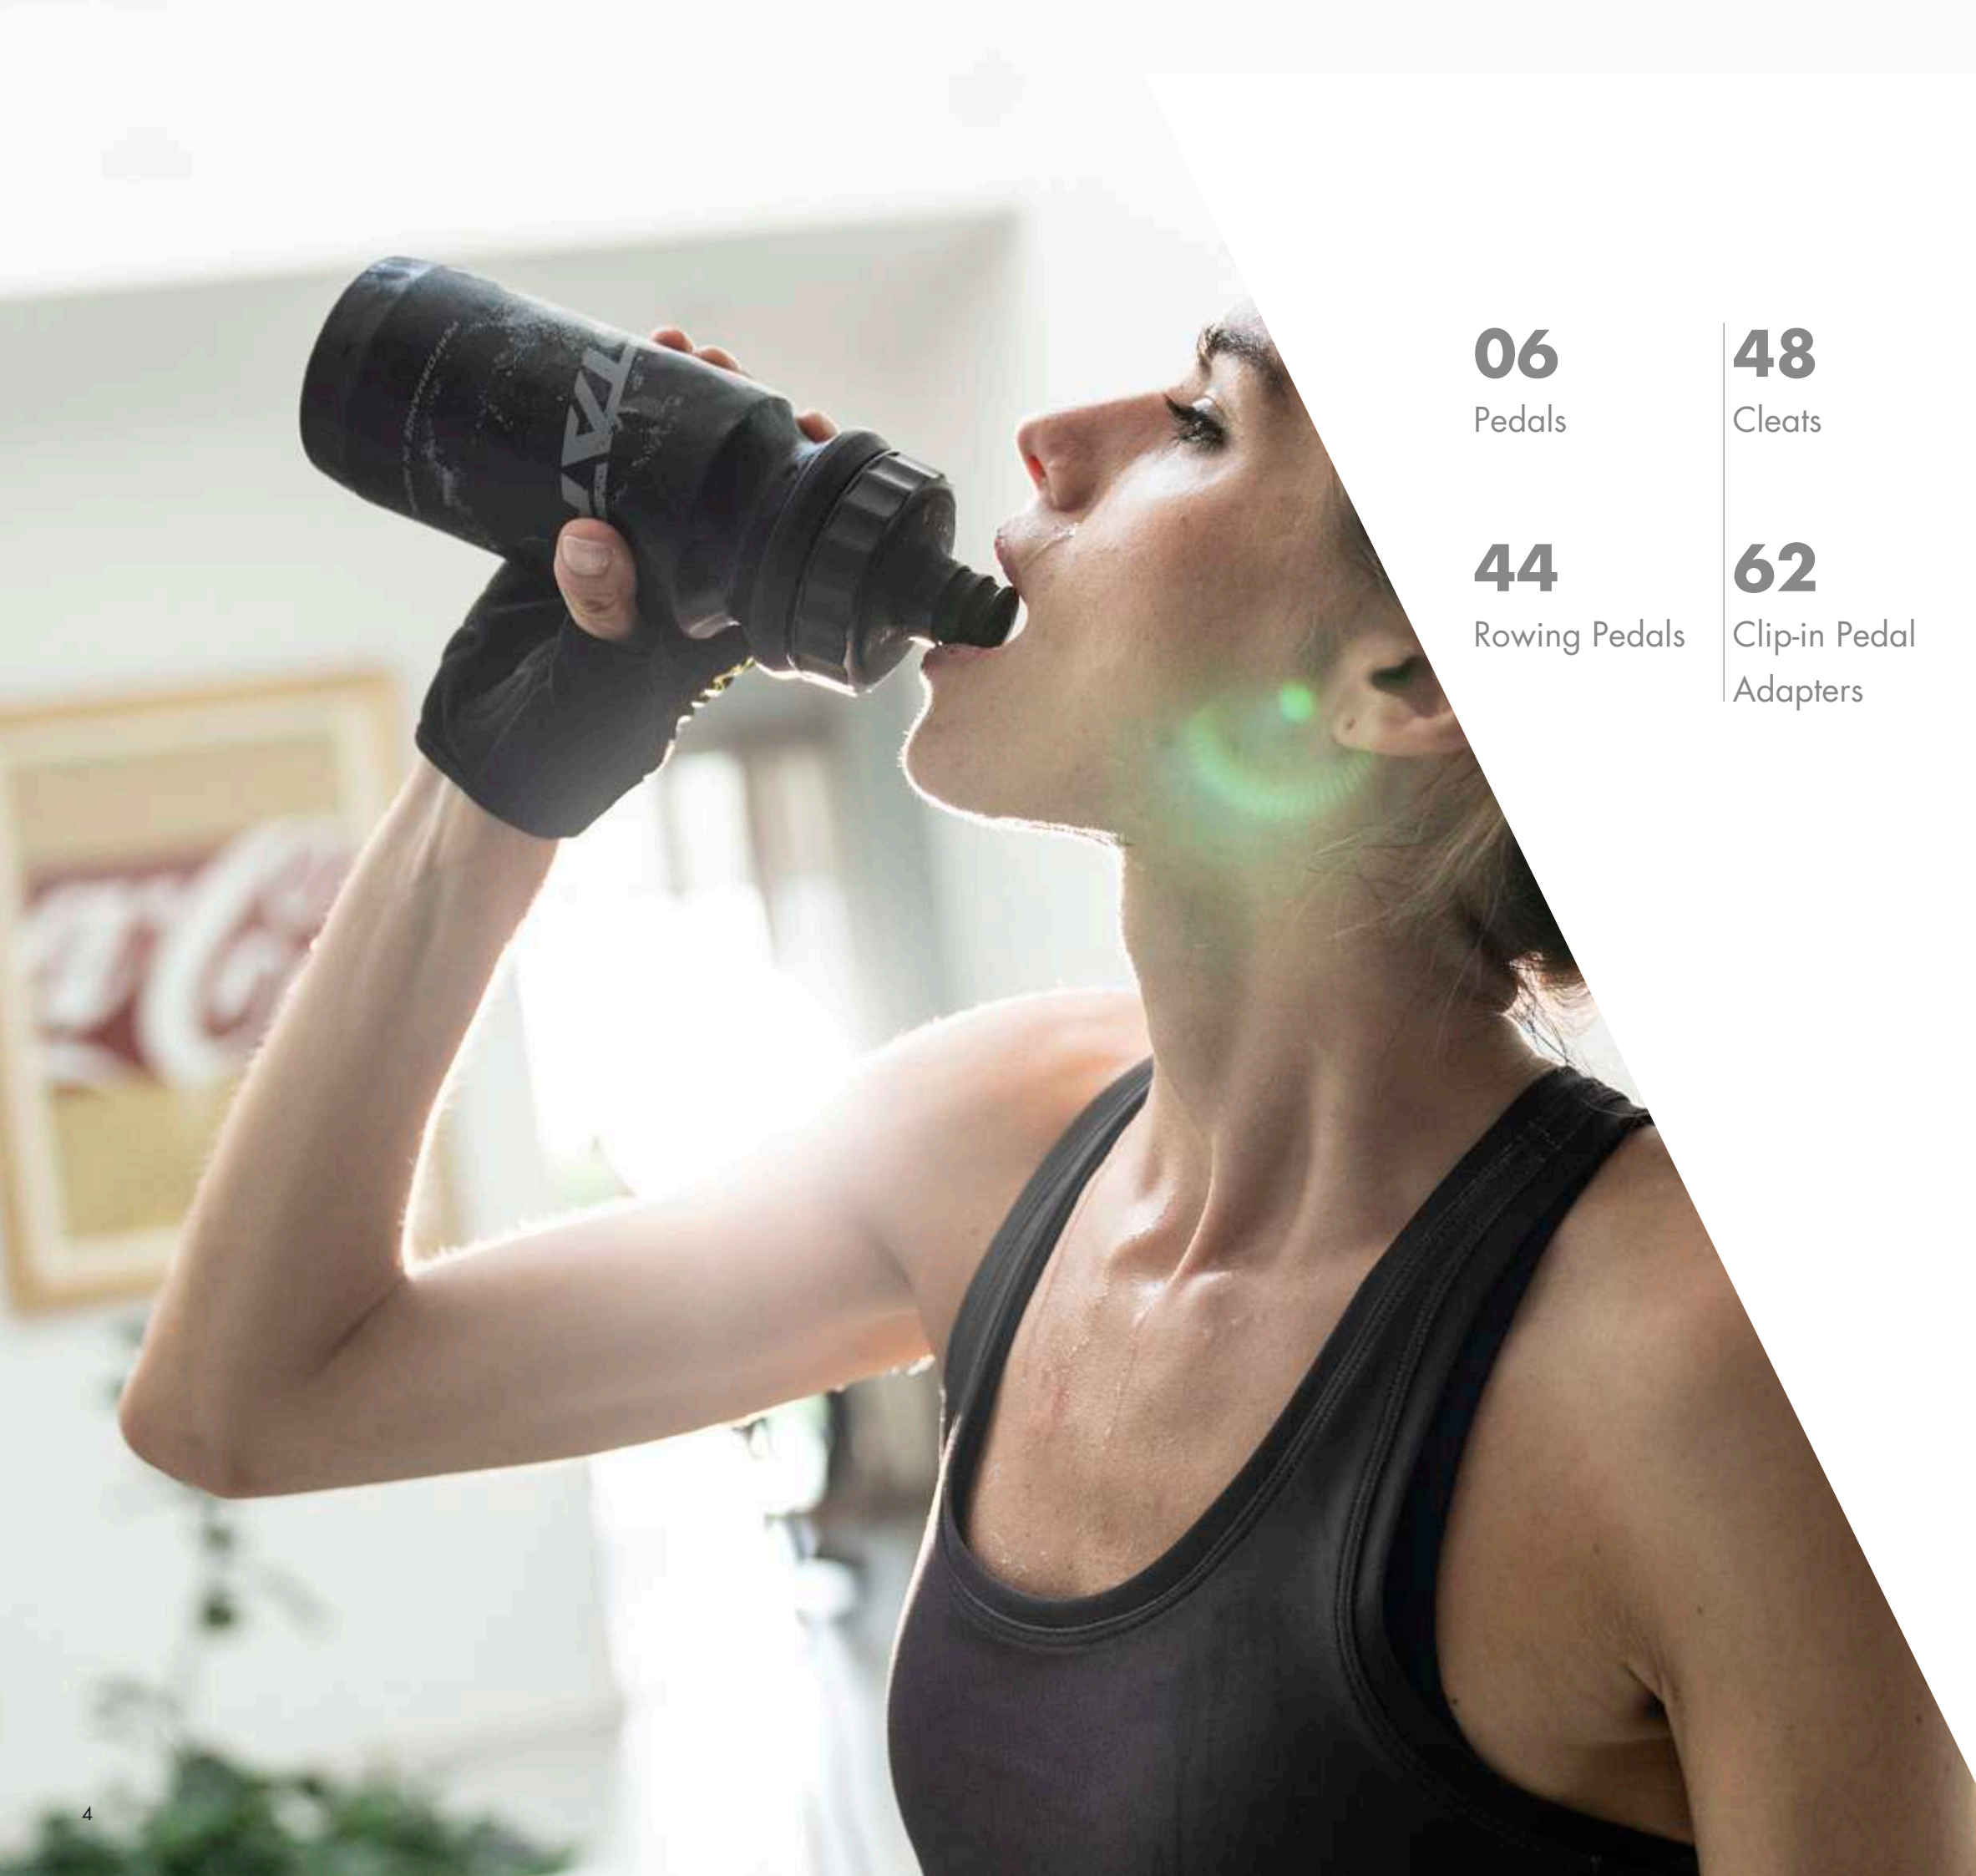

06

Pedals

48

Cleats

66

Shoes

102

Clothing

44

Rowing Pedals

62

Clip-in Pedal
Adapters

98

Soles

CONTENT

Indoor Cycling



INDOOR

Pedals



PEDAL TECHNOLOGY

BODY MATERIAL & MANUFACTURE & AXLES



FORGED ALUMINIUM BODY

Forged aluminum is the strongest pedal body we offer. Forging however, has some limitations shaping pedal bodies. For this reason, they are often further processed with CNC-machines.



ANODIZED BODY

Anodizing provides a protective coating, and is used to colour pedal body.



DIE-CAST ALUMINIUM BODY

Die-casting—a very serviceable technology—allows much freedom in shaping a pedal body.



EXTRUDED ALUMINIUM BODY

Extruding an aluminum pedal body ensures a stronger structure. Extruded aluminum can be anodised in a variety of colours.



CNC MACHINED ALUMINIUM BODY

Often a forged pedal body is CNC-machined to achieve the desired shape and finish. Extruded, CNC-machined aluminum can be anodised in a variety of colours.



SUPERSIZE AXLES

Supersize axle and anti-loosening axle device. Quad LSL bearings. Available in 4 different lengths.



ISXb (HYBRID) AXLE

Oversize axle with ISB drive system.



SUPERSIZE AXLES (ISXs DRIVE SYSTEM)

Available in 4 different lengths.



OVERSIZED NEEDLE BEARINGS

Large diameter needle bearings are used on pedals with oversized axles (such as indoor pedals, where strength is paramount). Needle bearings are very smooth running.



CRANK SIDE BEARINGS


Large ball bearings built into the pedal body close to the bicycle crank. These allow us to build a pedal platform that is very low profile.

OTHER FEATURES




ABRASION GUARD

Helps prevent cleat abrasion on the pedal body.

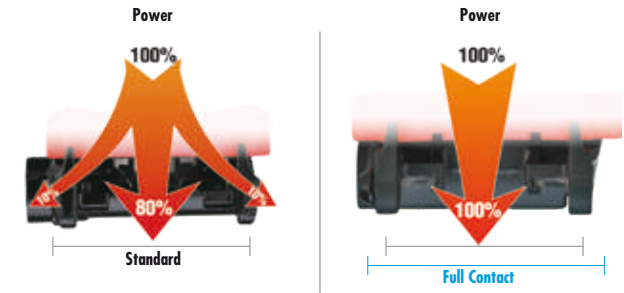

FULL CONTACT BODY

Increased contact area (62 mm wide) between pedal body and cleat ensures extra power, support, and stability. Interface also enables easier cleat engagement.

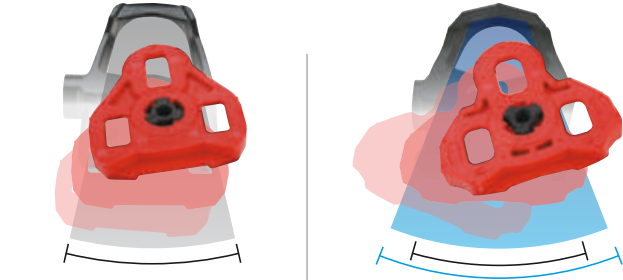


EASY TOE IN CLEAT ENGAGEMENT

Allows a wider angle range for easier toe-in engagement.



TENSION GAUGE

Integral binding tension indicator makes it easy for riders to set and adjust tension.



ICON GUIDE



EPS-R
Exciter Pedaling System

Compatible with
Look Keo / Delta

EPS-M
Exciter Pedaling System

Compatible with
Shimano SPD



**EPSX
ISX_b**



**EPSX
ISX_s**



Oversize axle



Oversize sealed & needle bearings.



E-PS7



E-PS8



E-PS9



E-PS10



E-PS11



E-PS12



E-PS13



E-PS207



E-PS815-C8



E-PS816-C8



E-PS817-C8



E-PS7SSP



E-PS11SSP



E-PS12SSP



E-PS13SSP



E-PS207SSP

ISX_b axle



Over size axle with ISXb drive system.



E-PS7 ISXb



E-PS8 ISXb



E-PS9 ISXb



E-PS10 ISXb



E-PS11 ISXb



E-PS12 ISXb



E-PS13 ISXb



E-PS815-C8 ISXb



E-PS816-C8 ISXb



E-PS817-C8 ISXb

Supersize axle



Supersize axle and anti-loosening axle device. Quad LSL bearings.



E-PS9 ISXs



E-PS11 ISXs

PEDAL TECHNOLOGY



1_ FULL CONTACT BODY

2_ IMPROVED TENSION ADJUSTER

New design prevents bolt from coming loose and separating from the pedal if loosened too much.

FULL CONTACT BODY


Increased contact area (62 mm wide) between pedal body and cleat ensures extra power, support, and stability. Interface also enables easier cleat engagement.



AXLES & BEARINGS


OVER-SIZED NEEDLE BEARINGS

Large diameter needle bearings are used on pedals with over-sized axles (such as indoor pedals, where strength is paramount). Needle bearings are very smooth running.

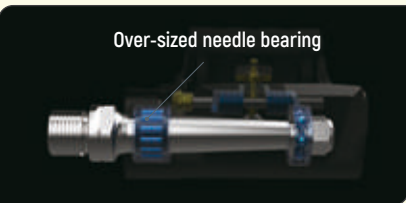

NEEDLE BEARINGS

Needle bearings are used to reduce friction, and increase contact area still allowing a slim axle profile.

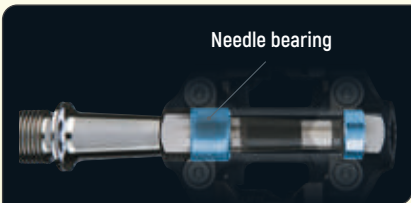

REMOVABLE SHOE PLATFORM

A platform that can be attached to many of our Dual Interface pedals. It allows ordinary sports shoes to be used with clip-in pedals.



OVERSIZE BEARING

These bearings are oversized for maximum strength and durability. Designed for the toughest fitness center conditions.

OVERSIZE AXLE

IMPROVED TENSION ADJUSTER

New design prevents bolt from coming loose and separating from the pedal if loosened too much.

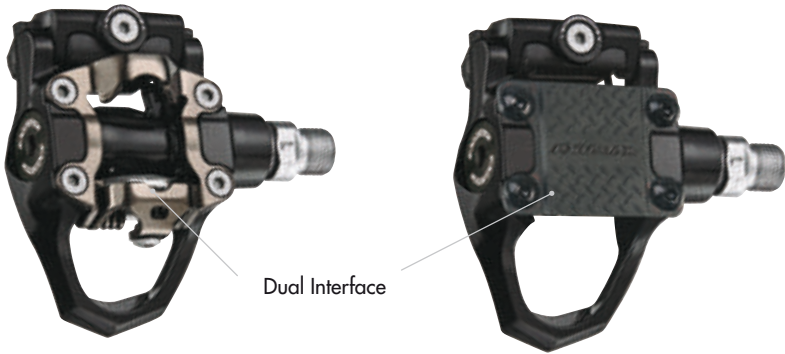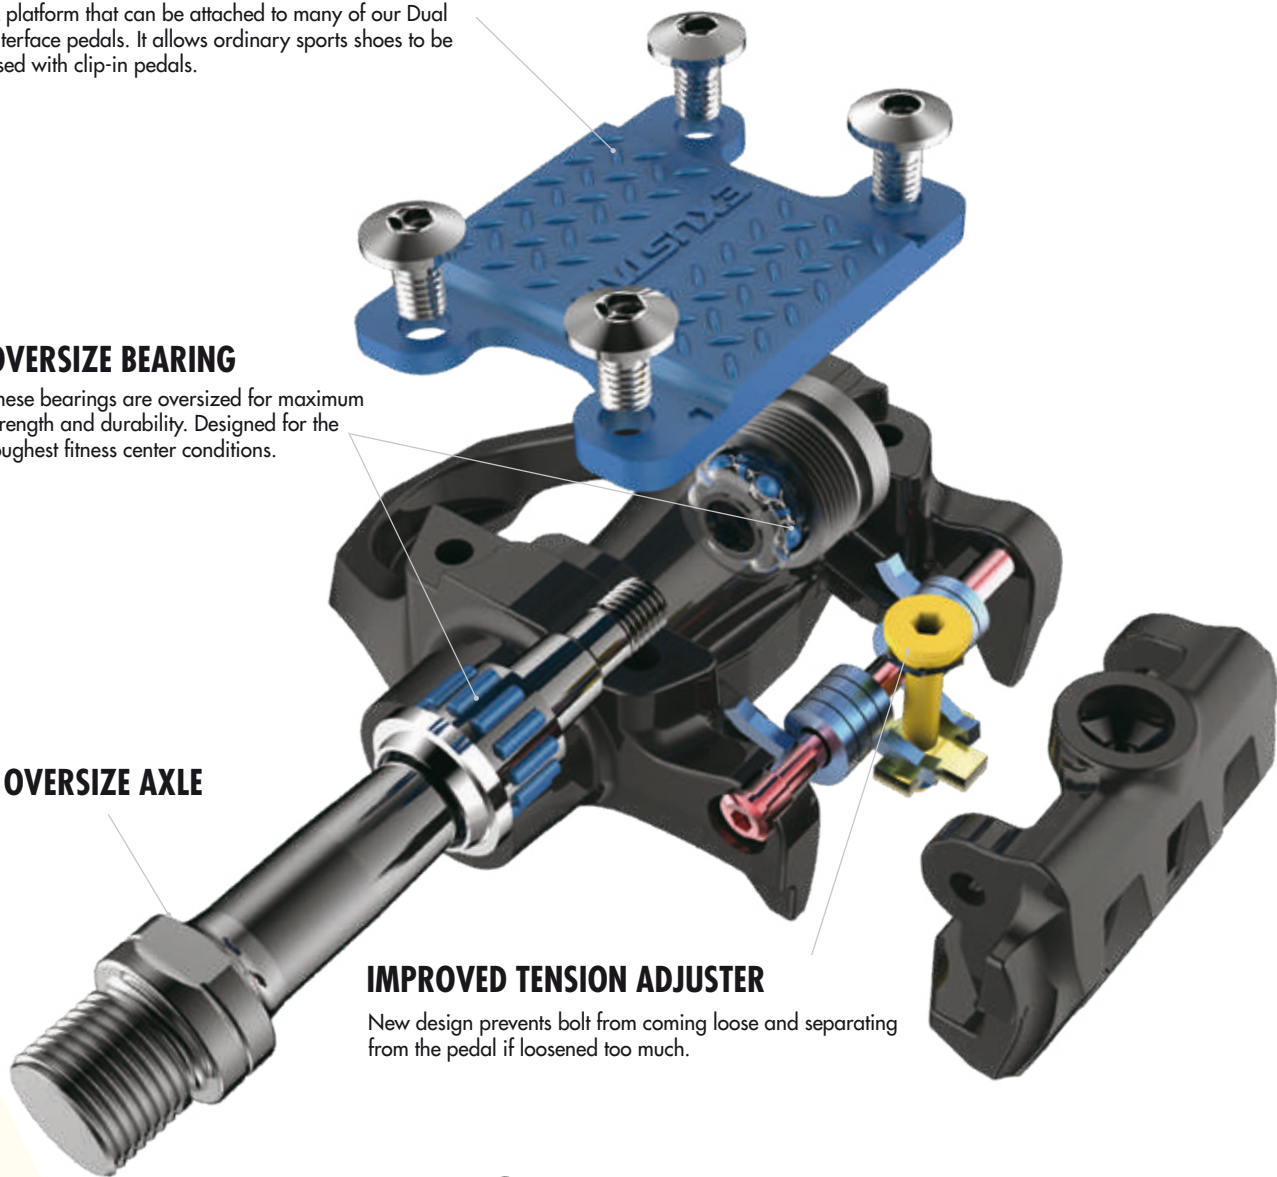

OVERSIZE AXLE

Designed for the toughest fitness center conditions, these axles are oversized for maximum strength and durability.



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: EPS-M (Compatible with Shimano SPD).



EMM208-BP



Oversize axle
Oversize sealed & needle bearings.



Tension Gauge
Integral binding tension indicator makes it easy for riders to set and adjust tension.

E-PS7 **EXPERT**
DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	87 x 94 mm



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: Plastic platform



Option



E-PS7SS1
Side B: No platform



EMP344



Oversize axle
Oversize sealed & needle bearings.

E-PS7SSP **EXPERT**
DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Delta) + Platform pedals.
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	87 x 94 mm



SIDE A: EPS-R (Compatible with Look Delta).

560 g/pr



SIDE B: EPS-M (Compatible with Shimano SPD).



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

E-PS8 **EXPERT**

DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	87 x 94 mm



SIDE A: EPS-R (Compatible with Look Delta).

496 g/pr



SIDE B: Plastic platform



Oversize axle
Oversize sealed & needle bearings.



EMP344

E-PS8SSP **EXPERT**

DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Delta) + Platform pedals.
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	87 x 94 mm



EPS-R (Compatible with Look Delta).



Oversize axle
Oversize sealed & needle bearings.



E-PS9 **EXPERT**
INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	88 x 94 mm



EPS-R (Compatible with Look Delta).



Oversize axle
Oversize sealed & needle bearings.



E-PS10 **EXPERT**
INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.


- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	88 x 94 mm



SIDE A: EPS-R (Compatible with Look Delta).

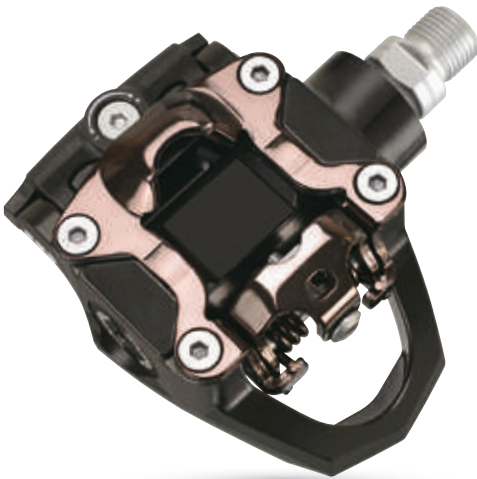

SIDE B: EPS-M (Compatible with Shimano SPD).



Oversize axle
Oversize sealed & needle bearings.



EMM350-BP-AY

E-PS11 **EXPERT**

DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	89 x 94 mm



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: Plastic platform



Oversize axle
Oversize sealed & needle bearings.



EMP391

E-PS11 SSP **EXPERT**

DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Delta) + Platform pedals.
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	89 x 94 mm



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: EPS-M (Compatible with Shimano SPD).



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

E-PS12 **EXPERT**

DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, oversize sealed & needle bearings and an abrasion guard. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant
- Abrasion guard



Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant, with stainless steel abrasion guard.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	88 x 94 mm



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: Plastic platform



Oversize axle
Oversize sealed & needle bearings.



EMP344

E-PS12SSP **EXPERT**

DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, oversize sealed & needle bearings and an abrasion guard. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant
- Abrasion guard



Interface	EPS-R (Compatible with Look Delta) + Platform pedals.
Body	Aluminum, nickel plated & ED black, corrosion resistant, with stainless steel abrasion guard.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	88 x 94 mm



SIDE A: EPS-SL (Compatible with Shimano SPD-SL).

594 g/pr



SIDE B: EPS-M (Compatible with Shimano SPD).



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

E-PS13 **EXPERT**

DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage , and an abrasion guard.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant
- Abrasion guard

Interface	EPS-SL (Compatible with Shimano SPD-SL). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant, with stainless steel abrasion guard.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	Shimano SPD-SL-style: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-RSL3 H1 & E-C05F
Size	88 x 94 mm



SIDE A: EPS-SL (Compatible with Shimano SPD-SL).

505 g/pr



SIDE B: Plastic platform



Oversize axle
Oversize sealed & needle bearings.



EMP344

E-PS13SSP **EXPERT**

DUAL INTERFACE CLIP-IN INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage , and an abrasion guard.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant
- Abrasion guard

Interface	EPS-SL (Compatible with Shimano SPD-SL) + Platform pedals.
Body	Aluminum, nickel plated & ED black, corrosion resistant, with stainless steel abrasion guard.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	Shimano SPD-SL-style: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-RSL3 H1
Size	88 x 94 mm





SIDE A: EPS-R (Compatible with Look Keo).



SIDE B: EPS-M (Compatible with Shimano SPD).



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

E-PS207 **EXPERT**
DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Keo). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC11+ & E-C05F
Size	87 x 90 mm



SIDE A: EPS-R (Compatible with Look Keo).



SIDE B: Plastic platform



Oversize axle
Oversize sealed & needle bearings.



EMP344

E-PS207SSP **EXPERT**
DUAL INTERFACE INDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with oversize axle and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- Oversize axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Keo) + Platform pedals.
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC11+
Size	87 x 90 mm

PATENTED



SIDE A: Toe clips and straps.



SIDE B: EPS-M (Compatible with Shimano SPD).

632 g/pr

Options



Side A: EPS-M (Compatible with Shimano SPD).



SIDE B: Platform pedals



EMM208-BP



Oversize axle
Oversize sealed & needle bearings.

E-PS815-C8 **EXPERT**
INDOOR PEDALS

A strong, durable indoor pedal. Featuring an oversize axle and sealed & needle bearings. Interface allows use with: 1. Toe clips and straps. 2. EPS-M (Compatible Shimano MTB system).

- Extra-strength oversize bearings
- Oversize axle



Interface	Toe clips and straps + EPS-M (Compatible with Shimano SPD).
Body	Aluminum.
Cage	Aluminum, ED black.
Axle	Oversize heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Other	Also compatible with conventional bicycles (outside use).
Size	113 x 145 mm

PATENTED



SIDE A: Platform + Toe clip attachable.



SIDE B: EPS-M (Compatible with Shimano SPD).

880 g/pr



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

E-PS816-C8 **ADVANCED**
INDOOR PEDALS

A strong, durable and versatile indoor pedal. Featuring an oversize axle and sealed & needle bearings and a robust mechanism. Interface allows use with: 1. EPS-M (Compatible Shimano MTB system). 2. Platform pedals. 3. Toe clips and straps.

- Oversize axle
- Oversize bearings



Interface	Toe clips and straps + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, ED black.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Size	98 x 115 mm (w/ toe clip 98 x 165 mm)



SIDE A: Platform + Toe clip attachable.



SIDE B: EPS-M (Compatible with Shimano SPD).



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

E-PS817-C8 **ADVANCED**
INDOOR PEDALS

A strong, durable indoor pedal. Featuring an oversize axle and sealed & needle bearings. Interface allows use with: 1. EPS-M (Compatible with Shimano SPD). 2. Platform pedals. 3. Toe clips and straps.

- Extra-strength oversize bearings
- Oversize axle




Interface	EPS-M (Compatible with Shimano SPD system). Platform pedals. Toe clips and straps.
Body	Aluminum. ED Black
Axle	Oversize heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Other	Also compatible with conventional bicycles (outside use).
Size	97.5 x 85 mm



SUPERSIZE AXLE TECHNOLOGY

- Supersize
- Anti-loosen device
- Extra-strong and durable
- Heat-treated
- CNC-machined Cr-Mo
- Supersize quad LSL bushing bearings


SUPERSIZE QUAD LSL BUSHING BEARINGS

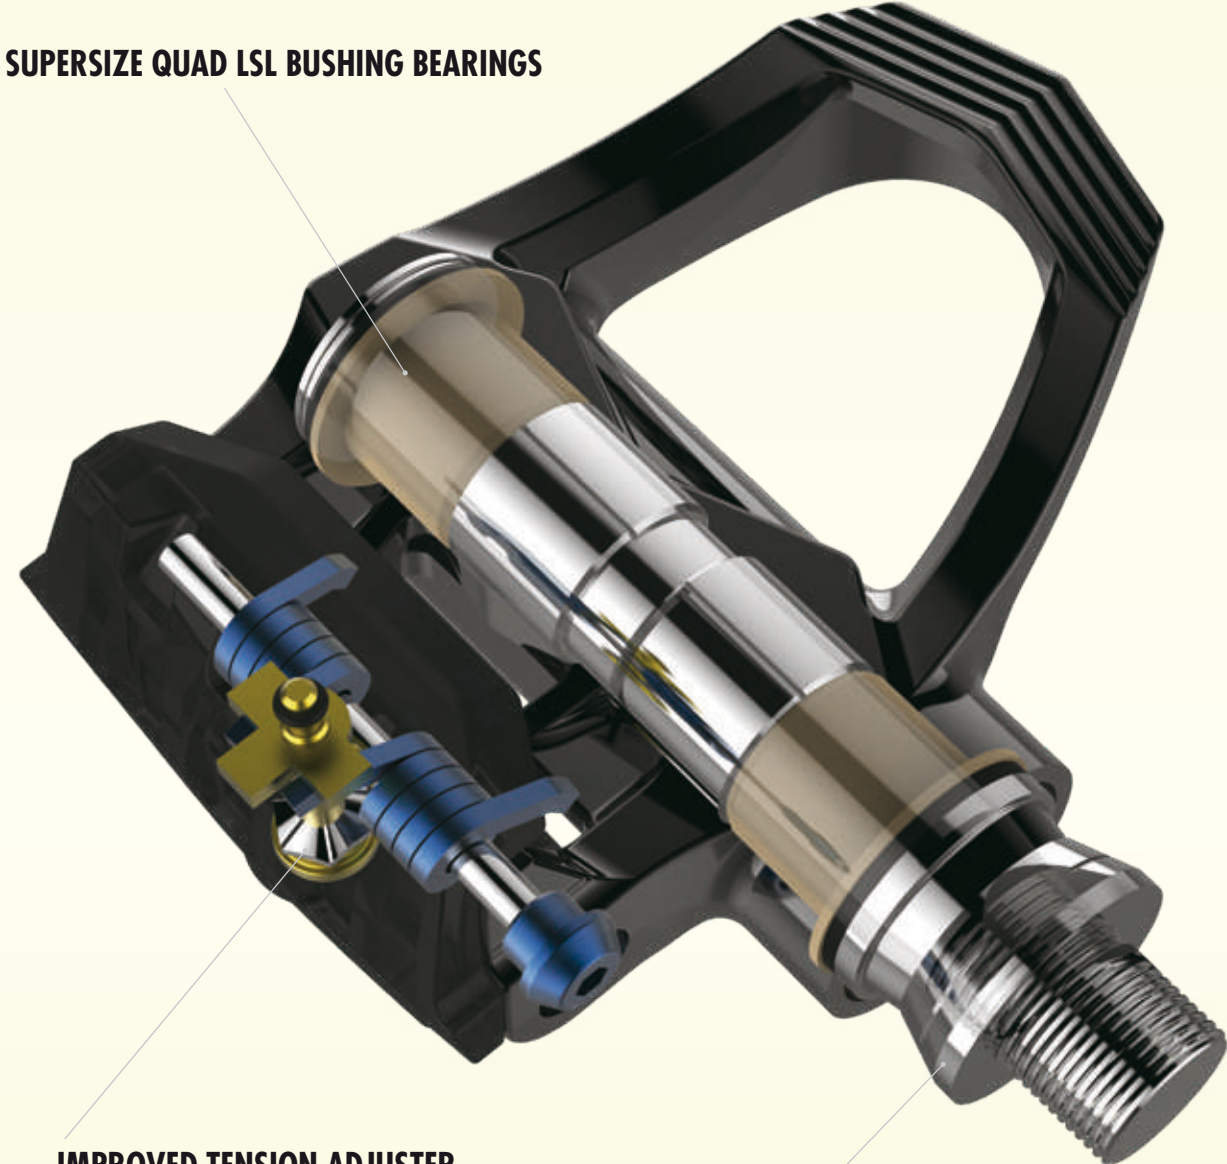

IMPROVED TENSION ADJUSTER

Special design prevents bolt from coming loose and separating from the pedal if loosened too much.

ANTI-LOOSEN DEVICE

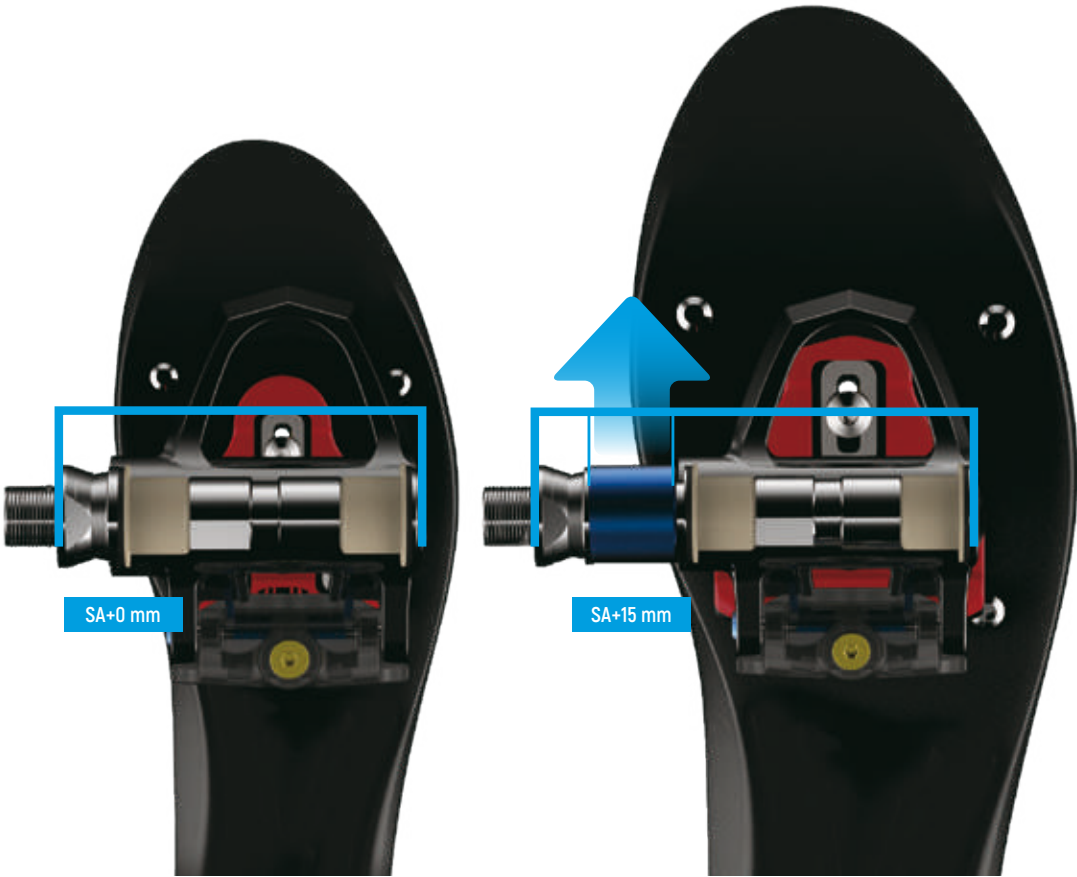

For Standard Shoe Sizes (35–48)

For Larger Shoe Sizes (49–59)

FOUR DIFFERENT LENGTHS


These can also be retrofitted to certain models of Exustar indoor pedals. In some cases, it may be best to consult with a professional bike fitter before using non-standard axles.

SUPERSIZE AXLES

4 SUPERSIZE LENGTH OPTIONS (Q Factor options)

Four different axle length options allow for varying the Q Factor (the distance between the left and right foot when pedaling). This enables a much higher level of customization of pedal and shoe setup. It is perfect for large shoe sizes and may help cyclists with other biomechanical bike fitting issues.

4 LENGTH OPTIONS

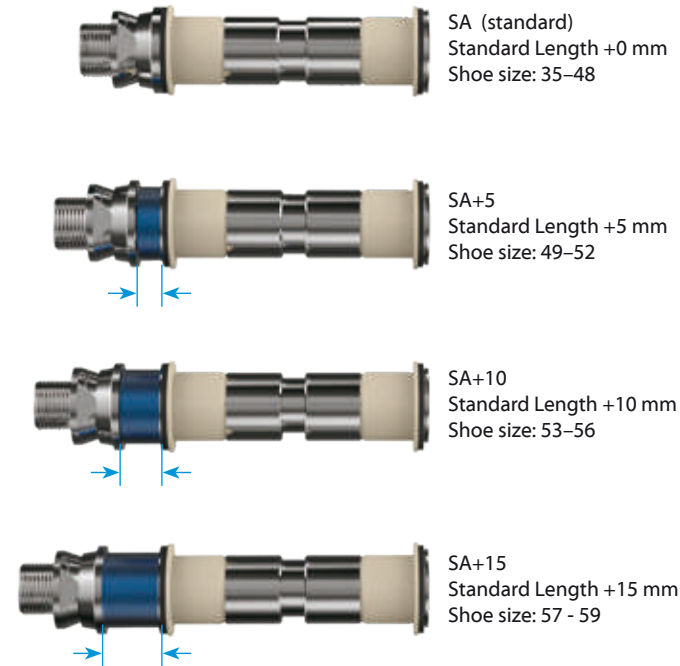

PATENTED



655 g/pr



EPS-R (Compatible with Look Delta).

E-PS9SA **EXPERT**

INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Anti-loosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device



Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.
Bearings	Quad LSL bearings.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	88 x 94 mm

PATENTED



645 g/pr



EPS-R (Compatible with Look Delta).

E-PS10SA **EXPERT**

INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Anti-loosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device




Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.
Bearings	Quad LSL bearings.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	89 x 94 mm

PATENTED



817 g/pr



EMM350-BP-AY

SIDE A : EPS-R (Compatible with Look Delta).

SIDE B : EPS-M (Compatible with Shimano SPD).

E-PS11SA **EXPERT**

DUAL INTERFACE INDOOR PEDALS

Strong, durable indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Antiloosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device



Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Antiloosening device.
Bearings	Quad LSL bearings.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	89 x 94 mm

Multi-interface (EPS-M: Compatible with Shimano **SPD**).

PATENTED



1034 g/pr



EMM208-BP

SIDE A : Platform + Toe clip attachable.


SIDE B : EPS-M (Compatible with Shimano SPD).

E-PS816SA-C8 **ADVANCED**

INDOOR PEDALS

A strong, durable and versatile indoor pedal. Featuring a supersize axle and quad LSL bearings, an extra robust mechanism and an anti-loosen axle device. Interface allows use with: 1. EPS-M (Compatible Shimano MTB system). 2. Platform pedals. 3. Toe clips and straps.

- Supersize axle
- Supersize quad bearings
- Anti-loosen axle device



Interface	EPS-M (Compatible with Shimano SPD system). Platform pedals. Toe clips and straps.
Body	Aluminum, ED black.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.
Bearings	Quad LSL bearings.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Size	98 x 115 mm (w/ toe clip 98 x 165 mm)

EPSX

BIKE

ISXb

OUTDOOR CYCLING DRIVE SYSTEM



SERIES

The Exustar ISXb Drive system consists of pedals and a crankset connected by the innovative ISXb Interface.

The ISXb Interface is a 10 tooth splined system that connects the pedal axle to the crank arm (crankset is compatible with ISIS Drive bottom brackets).

ISXb guarantees a stronger, more reliable pedal-to-crank interface that will stand up to rigorous use by even the heaviest and most aggressive riders on the road, trail or in the fitness center environment.

This system is designed for optimal strength and durability. Flexibility of use is also factored into the ISXb system: Optionally, Exustar pedals can be fitted with longer more beefy axles that suit users with larger, heavier physiques, and/or extra large shoe sizes.

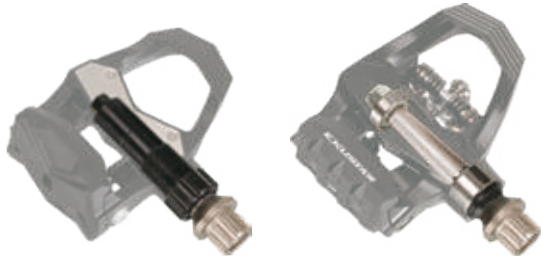

BENEFITS OF THE ISXb DRIVE

- Stronger interface
- More stable and durable
- Can be used with large diameter axles
- Can be used with longer axles



ISXb Splined Interface
(Patented)



ISXb Splined Interface
(Patented)



CRANKSET

Notes

Sold as a set, including ISXb pedals and crankset. Optionally, Exustar can also supply ISIS Drive bottom brackets. The ISXb Drive is compatible only with ISIS Drive bottom brackets.



SIDE A: EPS-R (Compatible with Look Delta).



SIDE B: EPS-M (Compatible with Shimano SPD).



Compatible



E-PS8 ISXb



E-PS9 ISXb



E-PS10 ISXb



E-PS11 ISXb



E-PS12 ISXb



E-PS13 ISXb

Option



EMP344



ISXb Axle
Oversize axle with ISXb drive system.



EMM208-BP

E-PS7 ISXb **EXPERT**

DUAL INTERFACE OUTDOOR PEDALS

Strong, durable, and versatile indoor pedal, compatible with road or MTB cleats. Featuring an extra robust mechanism with oversize axle, and oversize sealed & needle bearings. Anti-corrosion treatment protects against sweat damage.

- ISXb axle
- Extra-strength oversize bearings
- Corrosion resistant



Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, oversize CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable .
Cleats	E-ARC1 & E-C05F
Size	87 x 94 mm



SIDE A: Platform + Toe clip attachable.



SIDE B: EPS-M (Compatible with Shimano SPD).

Compatible



E-PS815-C8 ISXb



E-PS816-C8 ISXb



EMM208-BP



ISXb Axle
Over size axle with ISXb drive system.

E-PS817-C8 ISXb **ADVANCED**

OUTDOOR PEDALS

A strong, durable indoor pedal. Featuring an oversize axle and sealed & needle bearings. Interface allows use with: 1. EPS-M (Compatible with Shimano SPD). 2. Platform pedals. 3. Toe clips and straps.

- ISXb axle
- Extra-strength oversize bearings



Interface	EPS-M (Compatible with Shimano SPD). Platform pedals. Toe clips and straps.
Body	Aluminum. ED Black.
Axle	Oversize heat-treated, CNC-machined Cr-Mo.
Bearings	Oversize sealed & needle.
Binding	EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-C05F
Other	Also compatible with conventional bicycles (outside use).
Size	97.5 x 85 mm

EPSX


SPIN

ISXs

SERIES

INDOOR CYCLING DRIVE SYSTEM

SUPERSIZE QUAD LSL BUSHING BEARINGS

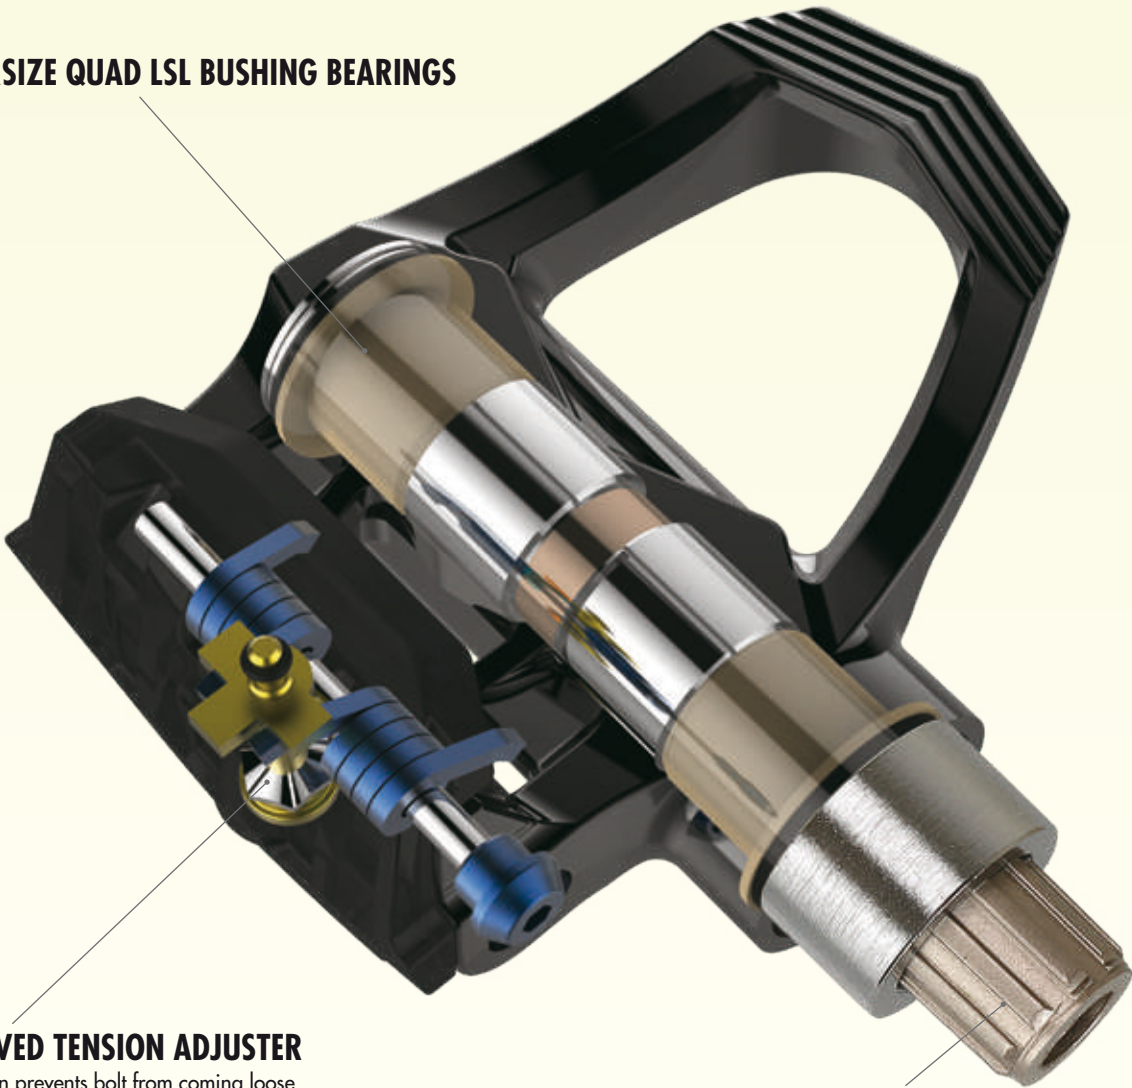


IMPROVED TENSION ADJUSTER

New design prevents bolt from coming loose and separating from the pedal if loosened too much.

ISXs Splined Interface


(Patented)

- Supersize
- EPSX drive system
- Extra-strong and durable
- Heat-treated
- CNC-machined Cr-Mo
- Supersize quad lsl bushing bearings

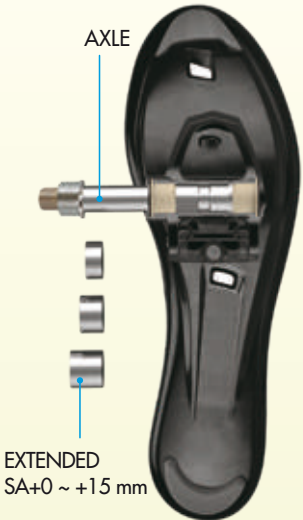

Axle Width Options

Tightening the locking ring prevents axle from ever accidentally coming loose.

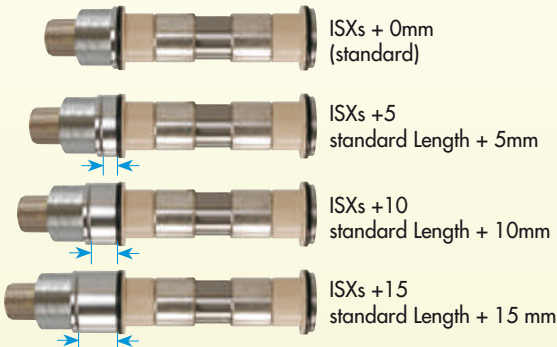

EPS-R (Compatible with Look Delta)

PATENTED



670 g/pr

EPS-R (Compatible with Look Delta).

E-PS9 ISXs EXPERT

INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Anti-loosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device



Interface	EPS-R (Compatible with Look Delta).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.
Bearings	Quad LSL bearings.
Bindings	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge.
Cleats	E-ARC1
Size	88 x 94 mm


Multi-interface (EPS-R: Compatible with Look Delta / EPS-M: Compatible with Shimano SPD).

PATENTED



826 g/pr

SIDE A : EPS-R (Compatible with Look Delta).

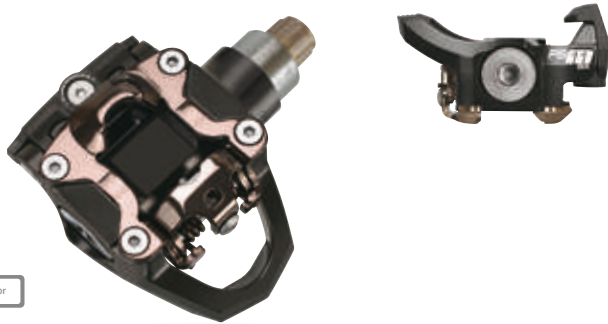

SIDE B : EPS-M (Compatible with Shimano SPD).

E-PS11 ISXs ADVANCED

DUAL INTERFACE INDOOR PEDALS

Strong, durable indoor pedal, compatible with road cleats. Featuring an extra robust mechanism with supersize axle, and quad LSL bearings. Anti-loosening axle device. Anti-corrosion treatment protects against sweat damage.

- Supersize axle
- Quad bearings
- Anti-loosening axle device




Interface	EPS-R (Compatible with Look Delta). + EPS-M (Compatible with Shimano SPD).
Body	Aluminum, nickel plated & ED black, corrosion resistant.
Axle	Heat-treated, supersize CNC-machined Cr-Mo. Anti-loosening device.
Bearings	Quad LSL bearings.
Binding	EPS-R: Fiberglass-reinforced thermoplastic, tension adjustable with gauge. EPS-M: Corrosion resistant Cr-Mo, tension adjustable.
Cleats	E-ARC1 & E-C05F
Size	89 x 94 mm



ROWING PEDAL TECHNOLOGY


DUAL BINDING CLIP-IN PEDAL SYSTEM

CONVENTIONAL FOOT STRETCHERS

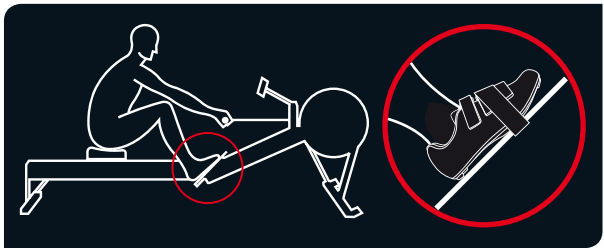

Rigid positioning.

EXUSTAR ROWING PEDALS

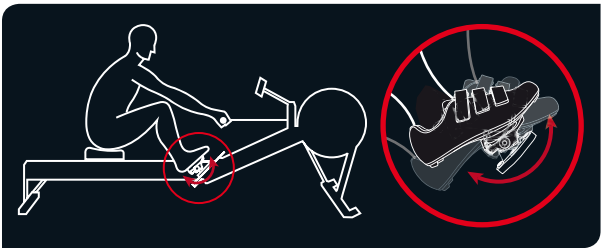


Concentrated power transfer.
Freedom of movement.

Exustar's clip-in rowing pedals offer benefits that top racing cyclists have been enjoying for decades. The efficient, concentrated power transfer of rowing pedals allow rowers to focus on improving performance and not foot position. Unlike conventional foot stretchers, rowing pedals allow freedom of movement, and the natural rotation of the ankle, helping avoid discomfort, strains and injury. Positioning on base plate is adjustable to suit a wide variety of rowing machines. Lateral spacing is adjustable to suit a range of user body and feet sizes. Rowing pedals can be fitted to a base plate with axles mounted on the inside of pedal bodies, or on the outside. And additional feature is that Exustar rowing pedals can also be used on indoor bikes.

Exustar dual binding pedals are used with clip-in bicycle shoes and Exustar EPS cleats or EPS-M cleats.



USA
China
Taiwan

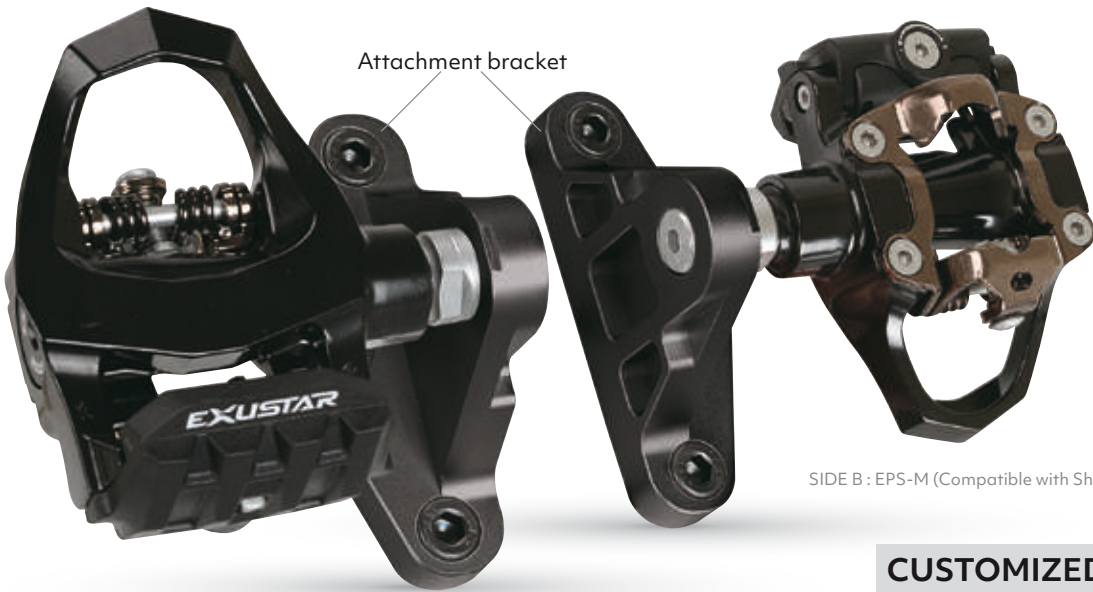


SIDE A : EPS-R (Compatible with Look Delta).

SIDE B : EPS-M (Compatible with Shimano SPD).

CUSTOMIZED



Adjustable Positioning

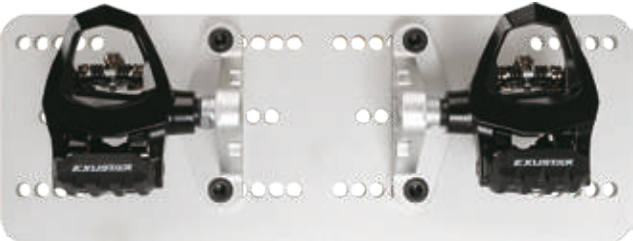

Base plate not included.



Oversize axle
Oversize sealed & needle bearings.



EMM208-BP

ROWING PEDALS **ADVANCED**

DUAL BINDING CLIP-IN PEDAL SYSTEM

Exustar clip-in rowing pedals offer benefits that top racing cyclists have been enjoying for decades.

- Efficient, concentrated power transfer
- Maximum natural ankle rotation
- Lateral freedom of movement
- Quick clip in and release




Pedal-Shoe Interface
Side A: EPS-R cleats (Compatible with Look Delta)
Side B: EPS-M cleats (Compatible with Shimano SPD)

Compatible clip-in bicycle shoes and cleats required.
EPS-R cleats or EPS-M cleats available separately from Exustar.

CLEATS


CLEAT TECHNOLOGY



USA : US8,453,353 B2/ 10625816
Japan : 3218904
Germany : 202018106478
China : ZL201810962794.8
Taiwan : I686148



Euro-PCT: EP19164985.4

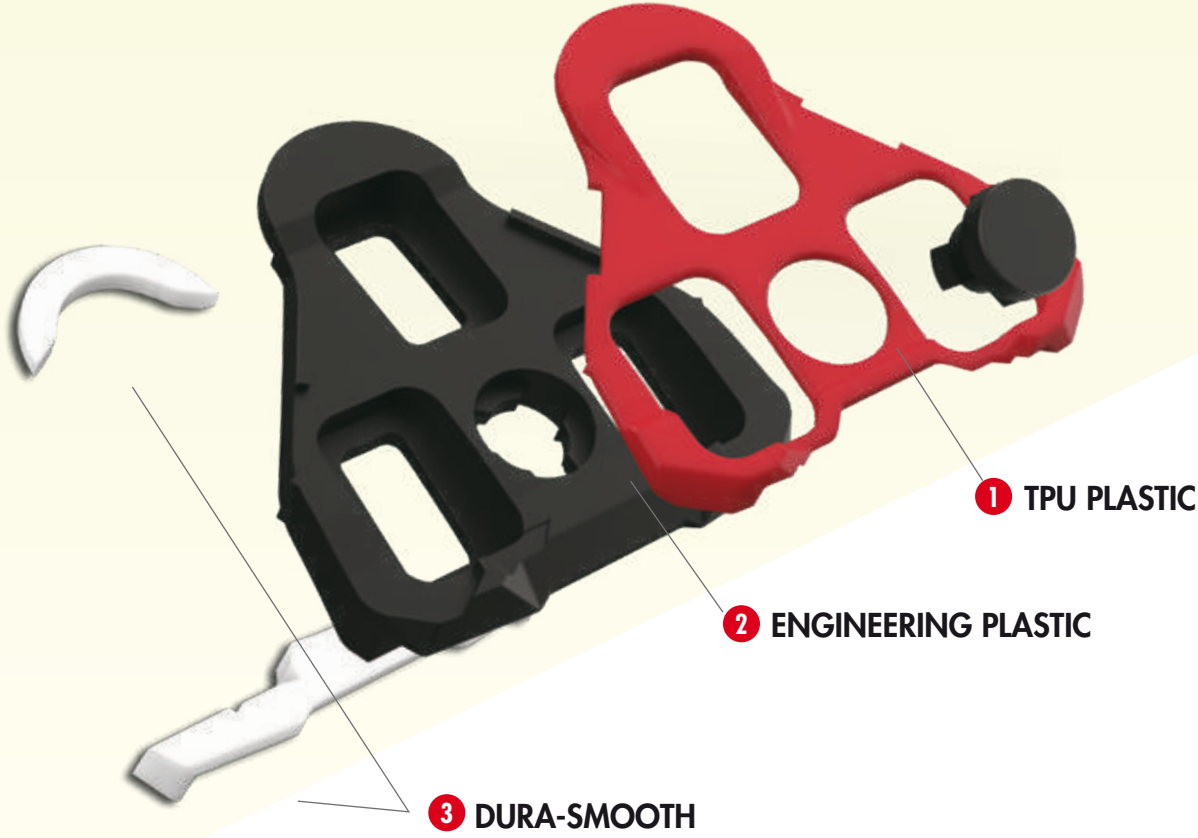

TRIPLE LAYER CLEATS

Exustar's top-line road cleats, consisting of an Engineering Plastic layer, a TPU Plastic layer and a Dura-Smooth Layer.

DURA-SMOOTH

Dura-Smooth (durable + smooth) refers to the third partial layer on our Triple Layer Cleats, the part of the cleat that connects with the pedal. The Dura-Smooth layer is made from reinforced polyoxymethylene, a material that is hard, ensuring long life, and smooth, facilitating easy pedal entry and exit.

WIDE-BEAM DESIGN

Some Exustar EPS-R road cleats feature a Wide-Beam design that provides greater contact area between pedal and shoes. This increases stability and power. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

ANTI-SLIP WALK LAYER

Some Exustar road cleats are equipped with an integrated TPU plastic anti-slip layer. This provides grip when walking on the road or footpath.



SIDE A

SIDE B

E-ARCR3H3

PRO



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Wide-Beam design provides greater power and stability. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS–R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Floating (6°).

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 50 g/pr

E-ARCR3H2



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.

- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS–R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Floating (6°).

Material Engineering thermoplastic / TPU plastic.

Weight 48 g/pr

E-ARCR3H1



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Cleats feature Wide-Beam design for greater power and stability.


- Wide-Beam

Interface EPS-R: Exustar EPS–R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Floating (6°).

Material Engineering thermoplastic.

Weight 51 g/pr

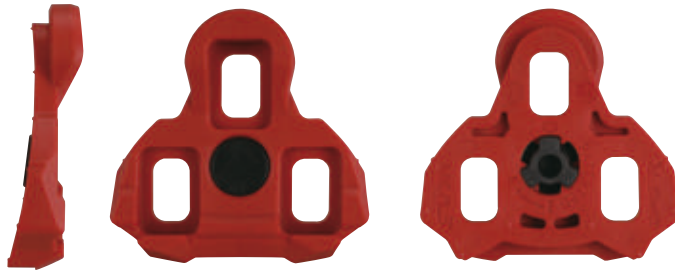

SIDE A

SIDE B



SIDE A

SIDE B

E-BLKR3H3

PRO



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Wide-Beam design provides greater power and stability. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS–R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 50 g/pr

E-BLKR3H2



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.

- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS–R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 48 g/pr



SIDE A

SIDE B

E-BLKR3H1



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Cleats feature Wide-Beam design for greater power and stability.

- Wide-Beam

Interface EPS-R: Exustar EPS–R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode Fixed position.

Material Engineering thermoplastic.

Weight 51 g/pr



SIDE A

SIDE B



SIDE A

SIDE B

E-RSL3H3 PRO



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Anti-slip walk layer

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Floating (6°).

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 57 g/pr

E-RSL3H2



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

- Anti-slip walk layer

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Floating (6°).

Material Engineering thermoplastic / TPU plastic.

Weight 54 g/pr



SIDE A

SIDE B

E-RSL3H1



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Floating (6°).

Material Engineering thermoplastic.

Weight 55 g/pr



SIDE A

SIDE B



SIDE A

SIDE B

E-BSL3H3 PRO



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Anti-slip walk layer

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 57 g/pr

E-BSL3H2



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

- Anti-slip walk layer

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 54 g/pr



SIDE A

SIDE B

E-BSL3H1



ROAD BIKE CLEATS

EPS-SL (Compatible with Shimano SPD-SL).

Interface EPS-SL: Exustar EPS-SL & Shimano SPD-SL pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic.

Weight 55 g/pr



SIDE A

SIDE B



SIDE A

SIDE B

E-ARC1H3 PRO



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Wide-Beam design provides greater power and stability. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes

Mode Floating (9°).

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 61 g/pr

E-ARC1H2



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.

- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Floating (9°).

Material Engineering thermoplastic / TPU plastic.

Weight 62 g/pr



SIDE A

SIDE B

E-ARC1H1



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

- Wide-Beam

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Floating (9°).

Material Engineering thermoplastic.

Weight 63 g/pr



SIDE A

SIDE B



SIDE A

SIDE B

E-BLK1H3 PRO



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Triple layer cleats featuring Dura-Smooth to facilitate easy pedal entry and exit. Wide-Beam design provides greater power and stability. Anti-slip layer for walking.

- Triple layer construction
- Dura-Smooth
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic / Dura-Smooth (reinforced polyoxymethylene).

Weight 61 g/pr

E-BLK1H2



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.

- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 62 g/pr



SIDE A

SIDE B

E-BLK1H1



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

- Wide-Beam

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode Fixed position.

Material Engineering thermoplastic.

Weight 63 g/pr



SIDE A

SIDE B



E-ARCR2: Floating (6°)



E-BLKR2: Fixed position

E-ARCR2 / E-BLKR2



ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS–R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode E-ARCR2: Floating (6°), E-BLKR2: Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 48 g/pr



E-ARC11+: Floating (6 °)



E-BLK11+: Fixed position

E-ARC11+ / E-BLK11+



ROAD BIKE CLEATS

EPS-R (Compatible with Look Keo).

- Anti-slip walk layer

Interface EPS-R: Exustar EPS–R & Look Keo pedals. / 3 bolt hole shoes.

Mode E-ARC11: Floating (6°), E-BLK11: Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 46 g/pr



E-ARC10: Floating (6°)



E-BLK10: Fixed position

E-ARC10 / E-BLK10



ROAD BIKE CLEATS

EPS-R (Compatible with Look Keo).

Interface EPS-R: Exustar EPS–R & Look Keo pedals. / 3 bolt hole shoes.

Mode E-ARC10: Floating (6°), E-BLK10: Fixed position.

Material Engineering thermoplastic.

Weight 48 g/pr



E-ARC5+: Floating (9°)



E-BLK5+: Fixed position

E-ARC5+ / E-BLK5+



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode E-ARC5+: Floating (9°), E-BLK5+: Fixed position.

Material Engineering thermoplastic / TPU plastic.

Weight 52 g/pr



E-ARC1: Floating (9°)



E-BLK1: Fixed position

E-ARC1 / E-BLK1



ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode E-ARC1: Floating (9°), E-BLK1: Fixed position..

Material Engineering thermoplastic.

Weight 46 g/pr

EPS-R CLEATS (Compatible with Exustar EPS-R & Look Keo pedals / 3 bolt hole shoes.)



E-ARCR2CK: Floating (6°)



E-BLKR2CK: Fixed position

E-ARCR2CK / E-BLKR2CK

ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Carbon fiber composite cleats feature Wide-Beam design for greater power and stability. Anti-slip layer for walking.

- Carbon fiber composite
- Wide-Beam
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode E-ARCR2CK: Floating (6°), E-BLKR2CK: Fixed position.

Material Carbon fiber-nylon composite / TPU plastic.

Weight 48 g/pr



E-ARCR20CK: Floating (6°)



E-BLKR20CK: Fixed position

E-ARCR20CK / E-BLKR20CK

ROAD BIKE CLEATS

EPS-R Wide-Beam (Compatible with Look Keo).

Carbon fiber composite cleats feature Wide-Beam design for greater power and stability.

- Carbon fiber composite
- Wide-Beam.

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode E-ARCR20CK: Floating (6°), E-BLKR20CK: Fixed position.

Material Carbon fiber-nylon composite.

Weight 48 g/pr



E-ARC11CK: Floating (6°)



E-BLK11CK: Fixed position

E-ARC11CK / E-BLK11CK

ROAD BIKE CLEATS

EPS-R (Compatible with Look Keo).

Carbon fiber composite cleats. Anti-slip layer for walking.

- Carbon fiber composite
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)

Mode E-ARC11CK: Floating (6°), E-BLK11CK: Fixed position.

Material Carbon fiber-nylon composite / TPU plastic.

Weight 45 g/pr



E-ARC10CK: Floating (6°)



E-BLK10CK: Fixed position

E-ARC10CK / E-BLK10CK

ROAD BIKE CLEATS

EPS-R (Compatible with Look Keo).

Carbon fiber composite cleats.

- Carbon fiber composite

Interface EPS-R: Exustar EPS-R & Look Keo pedals. / 3 bolt hole shoes. (Not compatible with Exustar PR200 series, E-PR107TK pedals or Look Keo Blade pedals.)


Mode E-ARC10CK: Floating (6°), E-BLK10CK: Fixed position.

Material Carbon fiber-nylon composite.

Weight 45 g/pr



E-ARC5: Floating (9°)



E-BLK5: Fixed position

E-ARC5CK / E-BLK5CK

ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta)

Carbon fiber composite cleats. Anti-slip layer for walking.

- Carbon fiber composite
- Anti-slip walk layer

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode E-ARC5: Floating (9°), E-BLK5: Fixed position.

Material Carbon fiber-nylon composite / TPU plastic.

Weight 53 g/pr



E-ARC1CK: Floating (9°)



E-BLK1CK: Fixed position

E-ARC1CK / E-BLK1CK

ROAD BIKE CLEATS

EPS-R (Compatible with Look Delta).

- Carbon fiber composite

Interface EPS-R: Exustar EPS-R & Look Delta pedals. / 3 bolt hole shoes.

Mode E-ARC1CK: Floating (9°), E-BLK1CK: Fixed position.

Material Carbon fiber-nylon composite.

Weight 49 g/pr





E-C01F

MTB CLEATS

EPS-M (Compatible with Shimano SPD).

- Forged for strength and durability

Interface	EPS-M: Compatible with Exustar EPS-M & Shimano SPD-style pedals. / 2 bolt hole shoes.
Cold Forged	Forged Cr-Mo steel.
Weight	40 g/pr



E-C05F

MTB CLEATS

EPS-M (Compatible with Shimano SPD)

- Forged for strength and durability.

Interface	EPS-M: Compatible with Exustar EPS-M & Shimano SPD-style pedals. / 2 bolt hole shoes.
Cold Forged	Forged Cr-Mo steel.
Weight	42 g/pr



E-C03F

MTB CLEATS

EPS-M (Compatible with Shimano SPD).

- Entry level (easier disengagement)
- Forged for strength and durability

Interface	EPS-M: Compatible with Exustar EPS-M & Shimano SPD-style pedals. / 2 bolt hole shoes.
Cold Forged	Forged Cr-Mo steel.
Weight	40 g/pr





ADAPTERS



Clip-in pedal adapters allow a user of clip-in pedals to conveniently and safely use them wearing ordinary sports shoes. The pedal adapter set consists of four (4) parts: a pedal-like platform, a toe clip, a toe strap, and a cleat (3 bolt hole or 2 bolt hole). A rider uses the adapter much like an ordinary platform pedal. The adapter can be used with or without a toe clip and strap.

NOTE: The pedal adapter unit is not a pedal nor a replacement for one. It does not have an axle.



E-SL02-K-A

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-ARCR3H1 Cleat + Toe Clip.

Pedal Interface	EPS-R (Compatible with Look Keo pedals).
Cleats	E-ARCR3H1
Weight	368 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02A

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-ARC1 Cleat + Toe Clip.

Pedal Interface	EPS-R (Compatible with Look Delta pedals).
Cleats	E-ARC1
Weight	379 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02D

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-C01F Cleat + Toe Clip.

Pedal Interface	EPS-M (Compatible with Shimano SPD pedals).
Cleats	E-C01F
Weight	363 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02-ESL-A

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-RSL3H1 Cleat + Toe Clip.

Pedal Interface	EPS-SL (Compatible with Shimano SPD-SL pedals).
Cleats	E-RSL3H1
Weight	372 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02B

CLIP-IN PEDAL ADAPTERS

E-SL02 Platform + E-BLK1 Cleat + Toe Clip.

Pedal Interface	EPS-R (Compatible with Look Delta pedals).
Cleats	E-BLK1
Weight	379 g/pr
Material	Engineering thermoplastic.

(Cleat, toe clip and toe strap can be attached to platform.)



E-SL02-B6

E-SL02 Platform + toe clip.

Engineering thermoplastic platform toe clip and toe strap can be attached to platform.

(Cleat, toe clip and toe strap can be attached to platform.)

PEDAL ADAPTER PLATFORMS (Compatible with Exustar series PS7, PS8, PS207).PS8, PS9, PS10, PS11, PR73).

PATENTED



E-SL09

CLIP-IN PEDAL ADAPTERS

Platform

- Aluminum platform
- Toe clip and toe strap can be attached to platform

Compatibility E-PS7, E-PS8, E-PS12, E-PS207.

PATENTED



E-SL09A

CLIP-IN PEDAL ADAPTERS

Platform + Toe Clip + Toe Strap.

- Aluminum platform, plastic toe clip, nylon strap.

Compatibility E-PS7, E-PS8, E-PS12, E-PS207




E-SL06

ADAPTER PLATFORM-CLEAT

Pedal Interface EPS-R (Compatible with Look Keo pedals).

Material Engineering thermoplastic platform.

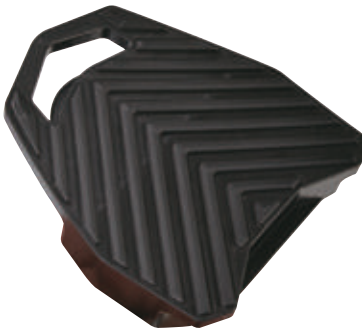

E-SL07

ADAPTER PLATFORM-CLEAT

Pedal Interface EPS-R (Compatible with Look Delta pedals).

Material Engineering thermoplastic platform.



E-SL08

ADAPTER PLATFORM-CLEAT

Pedal Interface EPS-SL (Compatible with Shimano SPD-SL pedals).

Material Engineering thermoplastic platform.





INDOOR

Shoes



SHOE TECHNOLOGY

GUIDE TO SHOE SOLES & ICON GUIDE



SLIMLINE CARBON FIBER SOLE

An extremely rigid, lightweight full carbon fiber sole for high performance riding.



CARBON FIBER

An extremely rigid, lightweight carbon fiber sole maximizes power transfer.



CARBON FIBER-NYLON COMPOSITE SOLE

A rigid combination of carbon fiber and nylon.



ROTARY MICROLOCK CLOSURE

The Rotary Microlock Closure system provides the greatest degree of fit, comfort, and precision adjustment in a bicycle shoe. It is a system, unlike traditional tie-up laces, that allows lace pressure to be equalised around your foot. Foot fit and foot comfort is literally dialled in—fine tuned—by a small mechanical reel that controls a network of laces. On the fly micro adjustment is quick and easy, ensuring perfect fit and comfort for the duration of your ride.



NYLON-FIBERGLASS COMPOSITE SOLE

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.



AIR CONTROL

Strategically placed vents in road shoe soles promote air circulation, which keeps feet cooler and drier.



RUBBER SOLE

Sole made form natural rubber.

SHOE FEATURES



ANTI-SLIP CLEAT SURFACE

anti-slip cleat surface on sole helps keep cleats firmly in place.



MICROLOCK M2 CLOSURE

The Microlock M2 is Exustar's 2nd generation cam and ratchet strap closure system. Besides being lighter and more compact, the M2 has several key advantages over our standard Microlock system:

Buckle is position-adjustable—there is a choice of two bolt hole positions so riders can individualise the basic setup.



1 Ratchet strap is easily replaceable.




2 Extra strong, forged tightening lever is shaped for easy access while riding.



3 Highly responsive release button is perfect in high pressure competition situations.



Cleat position indicator




CLEAT POSITION INDICATOR

Lines and numbers are marked on the shoe sole. Having ascertained your optimum cleat position on one shoe, by using the indicator as a guide, you can easily reproduce that position on the second shoe. Also handy when you replace old cleats with new—just duplicate the original position.



Screw-on cleat cover



SCREW-ON CLEAT RECESS COVER

Screw-on, reusable cleat recess cover gives a rider the option to use MTB shoes with or without cleats.



Screw-on walk pad



REPLACEABLE WALK PAD

A replaceable screw-on TPU anti-slip walk pad. Being able to replace the walk pad helps prolong the life of your shoes.

ADVANCED

EXPERT

COMP

SPORT



74

E-SR21111



74

E-SR21111B



94

E-SR4153-WH/BK



75

E-SR496



76

E-SR4173



77

E-SR419



78

E-SR466-BK



79

E-SR4152



80

E-SR456B



81

E-SR456



83

E-SM31111



84

E-SM3510



85

E-SM374



86

E-SM3310B-RD



87

E-SM3310-RD



89

E-SP858



90

E-SP848



91

E-SP838



92

E-SP818



93

E-SP828

CARBON SOLE

FEATURES

ROAD

- Thin, lightweight sole
- Extra-strong arch
- Large vents for maximum cooling
- Anti-slip rubber walk pads reduce wear
- Rigid I-beam structure eliminates torsion in the sole
- Cleat attachment slotted holes allow a greater adjustment range



Rigid I-beam structure eliminates torsion in the sole.




Large vents for maximum cooling.



Anti-slip rubber walk pads reduce wear on shoe sole.



Cleat attachment slotted holes allow a greater adjustment range.

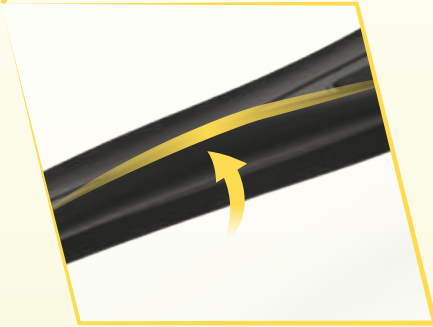

Extra-strong arch.



Anti-slip rubber walk pads reduce wear on shoe sole.



282 g/pc (#42)

Color Option



E-SR21111

E-SR21111B-WH

Carbon Fiber Sole

Stiffness 10

An extremely rigid, lightweight full carbon fiber sole for high performance riding.

Breathable mesh



E-SR21111-WH **ADVANCED**
CARBON FIBER ROAD SHOES

Advanced level road race shoe engineered for maximum performance. It features a Smooth Form upper with breathable mesh, and Rotary microlock closure. An extremely rigid, carbon fiber sole maximizes power transfer, while built-in Air Control vents help keep you cool, and rubber anti-slip walk pads are ready when your feet touch the ground.

- Smooth Form upper
- Rotary microlock closure
- Slimline carbon fiber sole
- Rubber walk pads
- Soft heel design for protecting Achilles tendon
- Cleat position indicator



Upper	Hot melt TPU with breathable mesh.
Closure	Rotary microlock closure, Velcro straps.
Sole	Carbon fiber with rubber walk pad. Air Control vents, cleat position indicator.
Insole	Ergonomic arch-design washable PU.
Interface	3 bolt hole cleats.
Size	37 - 48



300 g/pc (#42)

Color Option



E-SR496-WH

E-SR496-BL

E-SR496-RD

Nylon-fiberglass Composite Sole

Stiffness 7

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

Rotary microlock closure



E-SR496 **COMP**
ROAD SHOES

It features a contoured, comfortable PU leather upper, with breathable mesh, and Rotary microlock closure. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Rotary microlock closures
- Smooth Form upper
- Air Control sole vents
- Cleat position indicator



Upper	PU leather with TPU film, breathable mesh.
Closure	Rotary microlock closure, Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad, cleat position indicator.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



303 g/pc (#42)

Color Option



E-SR4173-RD

Nylon-fiberglass Composite Sole Stiffness 7

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR4173 COMP
ROAD SHOES

Comp level road shoe. It features a contoured, comfortable PU leather upper with breathable mesh and a Microlock buckle. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Microlock M2 buckle
- Air control sole vents



Upper	PU leather, breathable mesh.
Closure	Microlock M2 buckle, Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad.
Insole	Washable EVA.
Interface	3 bolt hole cleats.
Size	35 - 50



291 g/pc (#42)

Option



E-SR419PP

Nylon-fiberglass Composite Sole Stiffness 7

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

Breathable mesh



E-SR419 SPORT
ROAD SHOES

This sport level shoe is engineered for maximum performance. It features a comfortable Smooth Form hot melt TPU upper with breathable mesh. The nylon-fiberglass composite sole has Power Arch for efficient transfer of power, I-beam structure to eliminate torsion, built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground. Cleat Grip surface keeps your cleat firmly in place at all times.

- Hot melt upper
- Power Arch sole
- Rigid I-beam sole structure
- Air Control sole vents
- Cleat Grip
- Cleat position indicator



Upper	Hot melt (non-stitched) TPU with breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fiberglass composite with Power Arch, I-beam structure, Air Control vents, TPU walk pad, extra long cleat slots, Cleat Grip surface, and cleat position indicator.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



300 g/pc (#42)

Color Option



E-SR466A

Nylon-fiberglass Composite Sole Stiffness 7

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR466-BK **SPORT**
ROAD SHOES

This shoe features a comfortable PU leather upper with breathable mesh, and Velcro straps. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads for when your feet touch the ground.

- Cleat position indicator
- Air Control sole vents



Upper	PU leather, breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad, cleat position indicator.
Insole	Ergonomic arch-design, washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



320 g/pc (#42)

Color Option



E-SR4152-BK

Nylon-fiberglass Composite Sole Stiffness 7

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR4152 **SPORT**
ROAD SHOES

Sport level road shoe. This shoe features a comfortable PU leather upper with breathable mesh and Velcro straps. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Air Control sole vents
- Breathable mesh



Upper	PU leather, breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad.
Insole	Washable, perforated EVA.
Interface	3 bolt hole cleats. / 2 bolt hole cleats.
Size	37 - 50



328 g/pc (#42)

Color Option



E-SR456B-PB

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR456B **SPORT**
ROAD SHOES

Sport level road shoe. Features a contoured, comfortable PU leather upper with breathable mesh, and a Microlock buckle. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.

- Microlock M2 buckle
- Cleat position indicator
- Air Control sole vents



Upper	PU leather, breathable mesh.
Closure	Microlock M2 buckle, Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48



309 g/pc (#42)

Color Option



E-SR456-PB

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SR456 **SPORT**
ROAD SHOES

Sport level road shoe. Features a contoured, comfortable PU leather upper with breathable mesh, and Velcro straps. The nylon-fiberglass composite sole has built-in Air Control vents to help keep you cool, and anti-slip walk pads are ready when your feet touch the ground.


- Cleat position indicator
- Air Control sole vents



Upper	PU leather, breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fiberglass composite with Air Control vents, TPU walk pad.
Insole	Ergonomic arch-design washable EVA.
Interface	3 bolt hole cleats.
Size	37 - 48

CARBON SOLE FEATURES



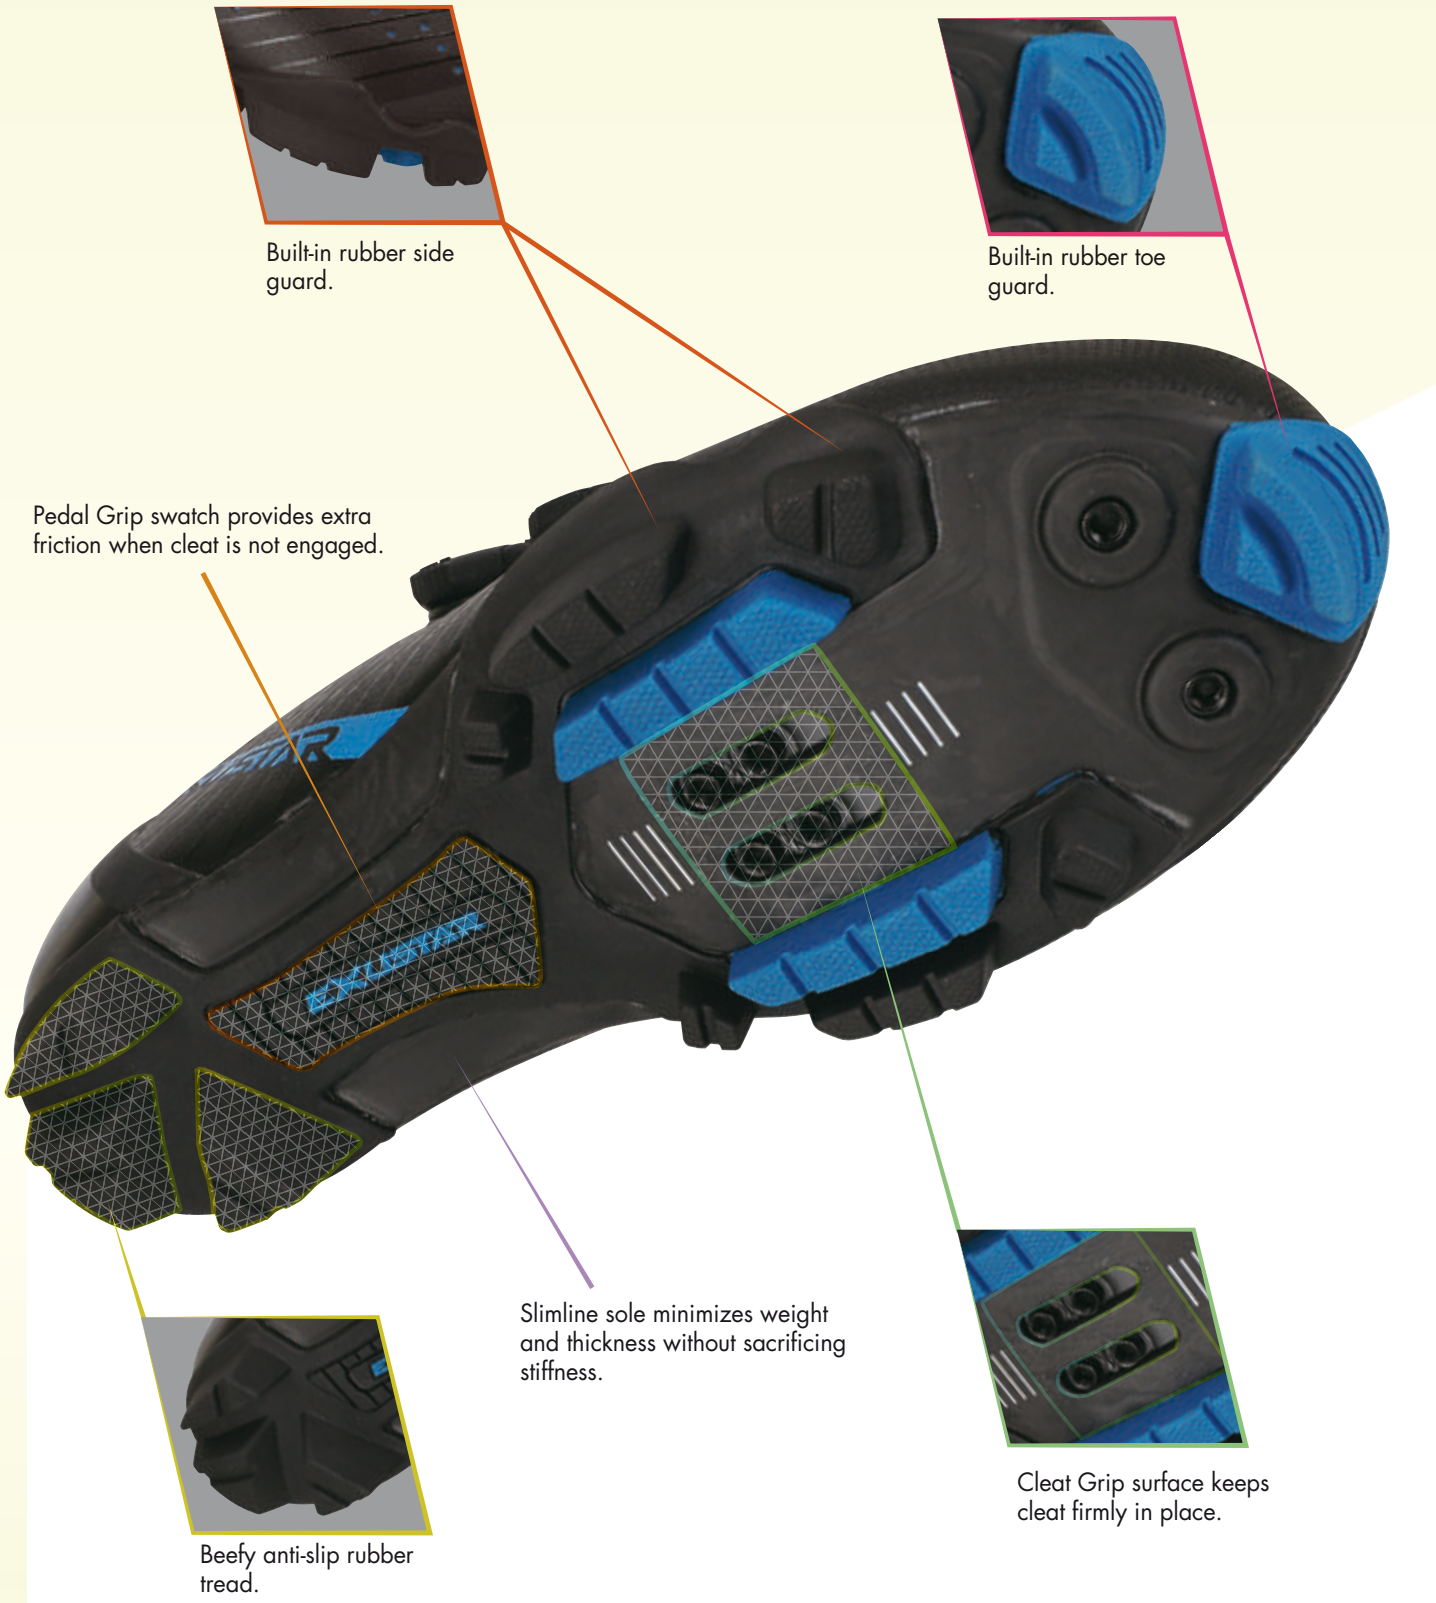

MTB



Carbon Fiber Sole Stiffness 10
An extremely rigid, lightweight full carbon fiber sole for high performance riding.



E-SM3111 **ADVANCED** MTB SHOES

- A MTB shoe engineered for top performance. It features a hot melt TPU upper with breathable mesh, dual rotary microlock closures with a pressure-relieving counter-directional Velcro strap, and a lightweight heel counter. A slimline carbon fiber sole minimizes weight and thickness without sacrificing stiffness. It is equipped with beefy anti-slip rubber tread, built-in toe and side guards, while our Pedal Grip swatch provides friction when the cleat is not engaged, and the Cleat Grip surface keeps your cleat firmly in place at all times.
- Hot melt upper
 - Dual rotary microlock closures
 - Lightweight heel counter
 - Slimline carbon fiber sole
 - Beefy mud-shedding rubber tread
 - Pedal Grip swatch
 - Cleat Grip
 - Cleat position indicator
- EPS-M**    



Upper	Hot melt (non-stitched) TPU with breathable mesh, lightweight heel counter.
Closure	Dual rotary microlock closures, Velcro strap.
Sole	Slimline Carbon fiber with rubber tread, rubber toe and side guards, Pedal Grip swatch, Cleat Grip surface, cleat position indicator, toe spikes attachable.
Insole	Ergonomic arch-design washable PU.
Interface	2 bolt hole cleats.
Size	37 - 48



Color Option



E-SM3510-BKWH



E-SM3510-BL



E-SM3510-GY



E-SM3510-GR

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

Toe spikes attachable



E-SM3510 **COMP**
MTB SHOES

It features a contoured, comfortable PU leather upper with breathable mesh and a rotary microlock closure. The nylon-fiberglass composite sole has anti-slip walk pads that are ready when your feet touch the ground.

- Smooth form upper
- Reinforced toe
- Rotary microlock closure
- Mud-shedding rubber tread
- Walk pads



Upper	PU leather with TPU, breathable mesh.
Closure	Rotary microlock closure, Velcro straps.
Sole	Nylon-fiberglass composite with rubber tread, anti-slip pedal pad, toe spikes attachable, cleat position indicator.
Insole	Ergonomic arch-design washable EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SM374 **SPORT**
MTB SHOES

This MTB shoe features a contoured, comfortable PU leather upper, with breathable mesh, and Velcro straps. The nylon-fiberglass composite sole has integrated TPU tread-perfect for all-terrain conditions.



Upper	PU leather, breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fibreglass composite with TPU tread, anti-slip pedal pad, toe spikes attachable.
Insole	Washable, perforated EVA.
Interface	2 bolt hole cleats.
Size	35 - 48



Color Option



Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SM3310B-RD **SPORT**

MTB SHOES

This MTB shoe features a contoured, comfortable PU leather upper, with breathable mesh, and a Microlock buckle. Nylon-fiberglass composite with rubber tread, anti-slip pedal pad. For all-terrain conditions.

- Microlock M2 buckle



Upper	PU leather, breathable mesh.
Closure	Microlock M2 buckle, Velcro straps.
Sole	Nylon-fiberglass composite with rubber tread, anti-slip pedal pad.
Insole	Ergonomic arch-design washable EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



Color Option



Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

E-SM3310-RD **SPORT**


MTB SHOES

This MTB shoe features a contoured, comfortable PU leather upper, with breathable mesh, and Velcro straps. Nylon-fiberglass composite with rubber tread, anti-slip pedal pad. For all-terrain conditions.



Upper	PU leather, breathable mesh.
Closure	Velcro straps.
Sole	Nylon-fiberglass composite with rubber tread, anti-slip pedal pad.
Insole	Ergonomic arch-design washable EVA.
Interface	2 bolt hole cleats.
Size	37 - 48

NEW GENERATION SEMI-FLEXIBLE SPORT SOLE

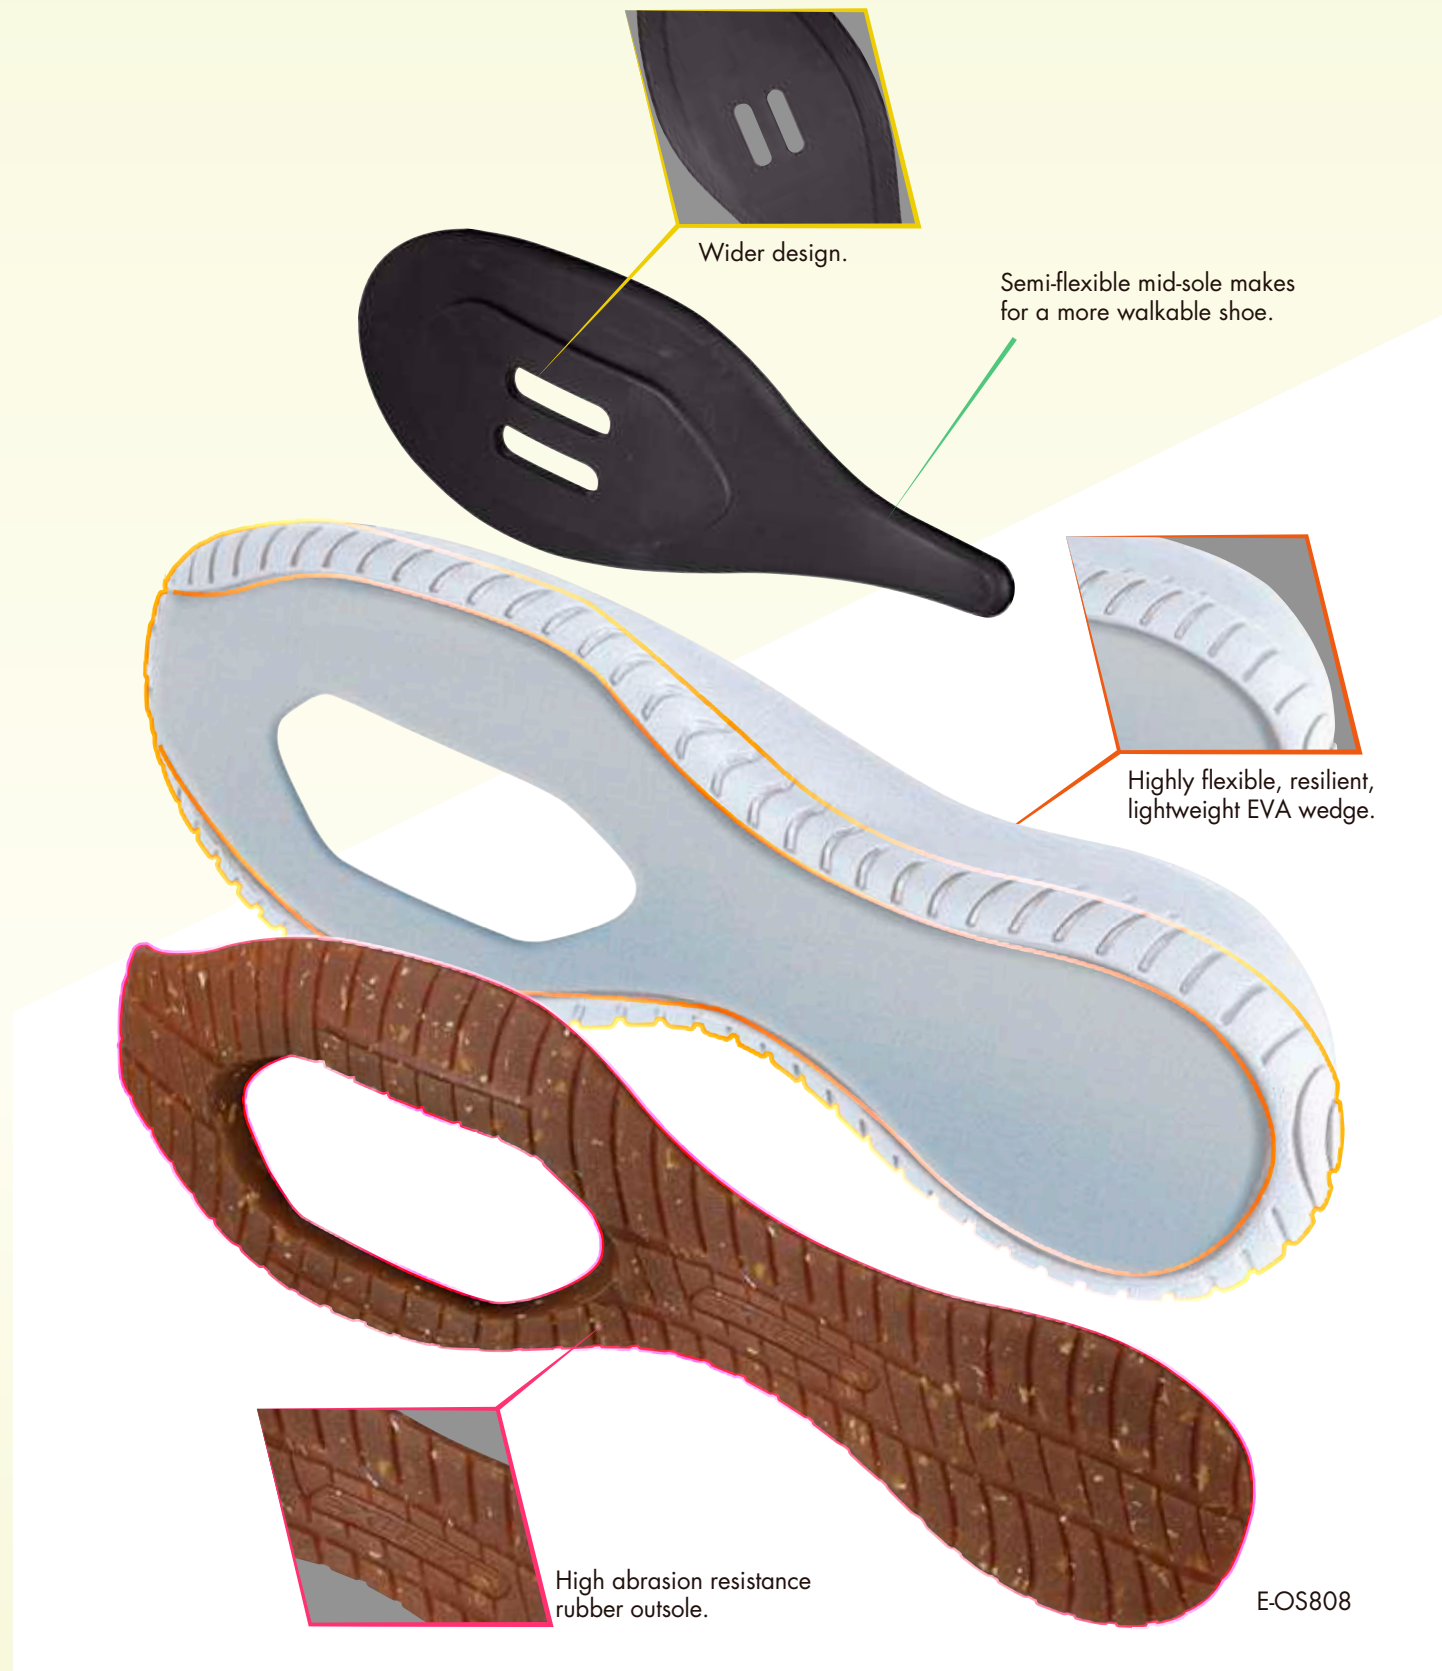

Rubber Sole
Sole made from natural rubber.

Stiffness **5**



E-SP858 **SPORT** INDOOR CYCLING SHOES

This sport level shoe is engineered for maximum performance. It features a comfortable hot melt TPU upper with breathable mesh and a flexible rubber sole.



- | | |
|-----------|---|
| Upper | Hot melt (non-stitched) TPU with breathable mesh. |
| Closure | Velcro straps. |
| Sole | Recycled rubber with EVA wedge. |
| Midsole | Nylon. |
| Insole | Eronomic arch-design washable EVA. |
| Interface | 2 bolt hole cleats. |
| Size | 37 - 48 |



385 g/pc (#42)

Rubber Sole

Sole made from natural rubber.

Stiffness 5

Breathable mesh



E-SP848 **SPORT**
INDOOR CYCLING SHOES

This sport level shoe is engineered for maximum performance. It features a comfortable hot melt TPU upper with breathable mesh and a flexible rubber sole.

- Hot melt upper
- Cleat position indicator



Upper	Hot melt (non-stitched) TPU with breathable mesh.
Closure	Laces.
Sole	Recycled rubber with EVA wedge.
Midsole	Nylon.
Insole	Eronomic arch-design washable EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



358 g/pc (#42)

Rubber Sole

Recycle environmentally friendly materials.

Stiffness 5

E-SP838 **SPORT**
INDOOR CYCLING SHOES

Sport level indoor shoe. It features a Smooth Form upper with breathable mesh and Velcro straps. The highly flexible lightweight EVA with environmentally-friendly recycled rubber sole enables non-slip, comfortable walking. Compatible with clip-in or platform pedals.

- Smooth Form upper
- Highly flexible midsole
- Cleat position indicator



Upper	Hot melt TPU, breathable mesh.
Closure	Velcro straps.
Sole	Rubber with EVA wedge.
Midsole	Nylon.
Insole	Ergonomic arch-design washable EVA.
Footpad	EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



Rubber Sole

Sole made from natural rubber.



E-SP818 **SPORT**
INDOOR CYCLING SHOES

This versatile sneaker-style shoe is designed for indoor cycling, urban cycling or recreational cycling and is compatible with clip-in pedals or platform pedals. A compound rubber sole provides optimal grip on and off the bike.



Upper	PU leather, breathable mesh, with elastic band.
Closure	Velcro Straps.
Sole	EVA+RB.
Midsole	Nylon.
Insole	Washable perforated EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



Rubber Sole

Sole made from natural rubber.



E-SP828 **SPORT**
INDOOR CYCLING SHOES

This versatile sneaker-style shoe is designed for indoor cycling, urban cycling or recreational cycling and is compatible with clip-in pedals or platform pedals. A compound rubber sole provides optimal grip on and off the bike.



Upper	PU film with breathable mesh.
Closure	Laces.
Sole	EVA+RB.
Midsole	Nylon.
Insole	Washable perforated EVA.
Interface	2 bolt hole cleats.
Size	37 - 48



302 g/pc (#42)

SIZE 35-48

Nylon-fiberglass Composite Sole **Stiffness 7**

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

SIZE 49-59

Sidewall Carbon Fiber Sole **Stiffness 10**

Our top of the line sole, Sidewall offers maximum power transfer, impact protection, comfort, and light weight.

E-SR4153-WHBK **ADVANCED**
FULL SIZE RANGE SHOES

An indoor cycling shoe engineered for top performance. It features a contoured, supple PU leather upper, with breathable mesh, and a Microlock buckle. The sole has built-in Air Control vents to help keep you cool, and non-slip walk pads are ready when your feet touch the ground. With nylon-fiberglass composite or carbon fiber soles (depending on size).

- Wide range of sizes including extra large
- Microlock M2 buckle
- Cleat position indicator



Microlock M2 closure



- Upper PU leather, breathable mesh.
- Closure Microlock M2 buckle, Velcro straps.
- Sole Nylon-fiberglass composite (35-48).
Carbon fiber sole (49-59).
- Insole Washable perforated EVA.
- Interface 3 bolt hole cleats.
- Size 35 - 48 (Nylon-fiberglass composite sole);
49 - 59 (Carbon fiber sole).

FULL SIZE RANGE
SHOES (Size 35-59)

Exustar introduces our first large size cycling shoes. With sizes ranging from 35–59, this high-end product is perfect for the discerning indoor or outdoor cyclist with larger feet.



E-SR4153-WH/BK

Color Options



E-SR4153-WH/OG



E-SR4153-BK/WH



E-SR4153



SIZE 35-48

Stiffness 7

Nylon-fiberglass Composite Sole
A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.



SIZE 49-59


Stiffness 10

Sidewall Carbon Fiber Sole
Our top of the line sole, Sidewall offers maximum power transfer, impact protection, comfort, and light weight.

SIZE 35-48														
EURO	35	36	37	38	39	40	41	42	43	44	45	46	47	48
US	3.5	4	4.5	5.5	6.5	7	8	8.5	9.5	10.5	11	12	13	13.5
UK	2.5	3	3.5	4.5	5.5	6	7	7.5	8.5	9.5	10	11	12	12.5
JP	22.5	23.0	23.5	24.0	25.0	25.5	26.0	27.0	27.5	28.5	29.0	29.5	30.5	31.0

SIZE 49-59											
EURO	49	50	51	52	53	54	55	56	57	58	59
US	14.5	15	16	16.5	17.5	18	19	20	20.5	21.5	22
UK	13.5	14	15	15.5	16.5	17	18	19	19.5	20.5	21
JP	31.5	32.0	33.0	33.5	34.0	35.0	35.5	36.0	37.0	37.5	38.0


FULL SIZE RANGE SHOES

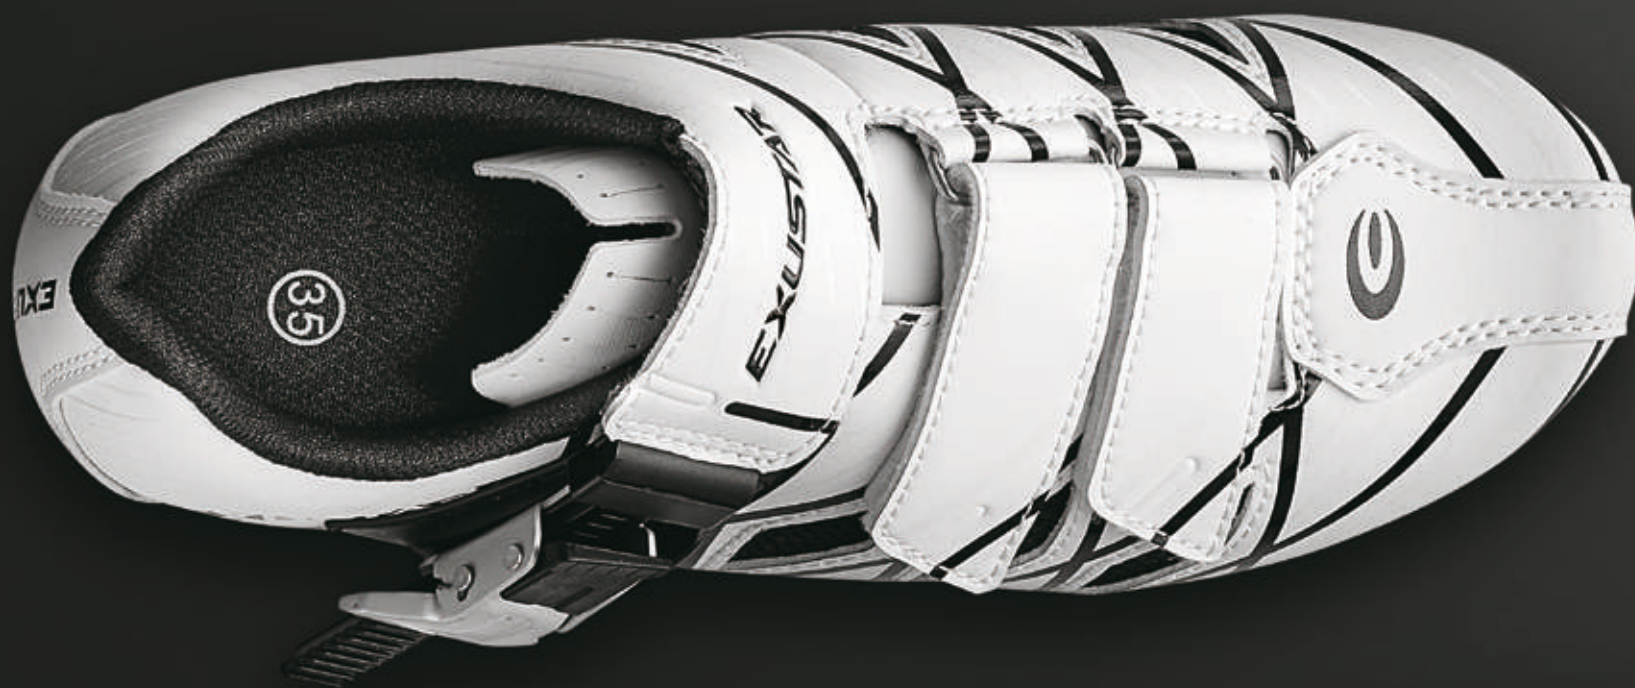

SIZE 35–48

NYLON-FIBERGLASS COMPOSITE SOLE

A sole constructed of nylon-fiberglass with good stiffness and durability characteristics.

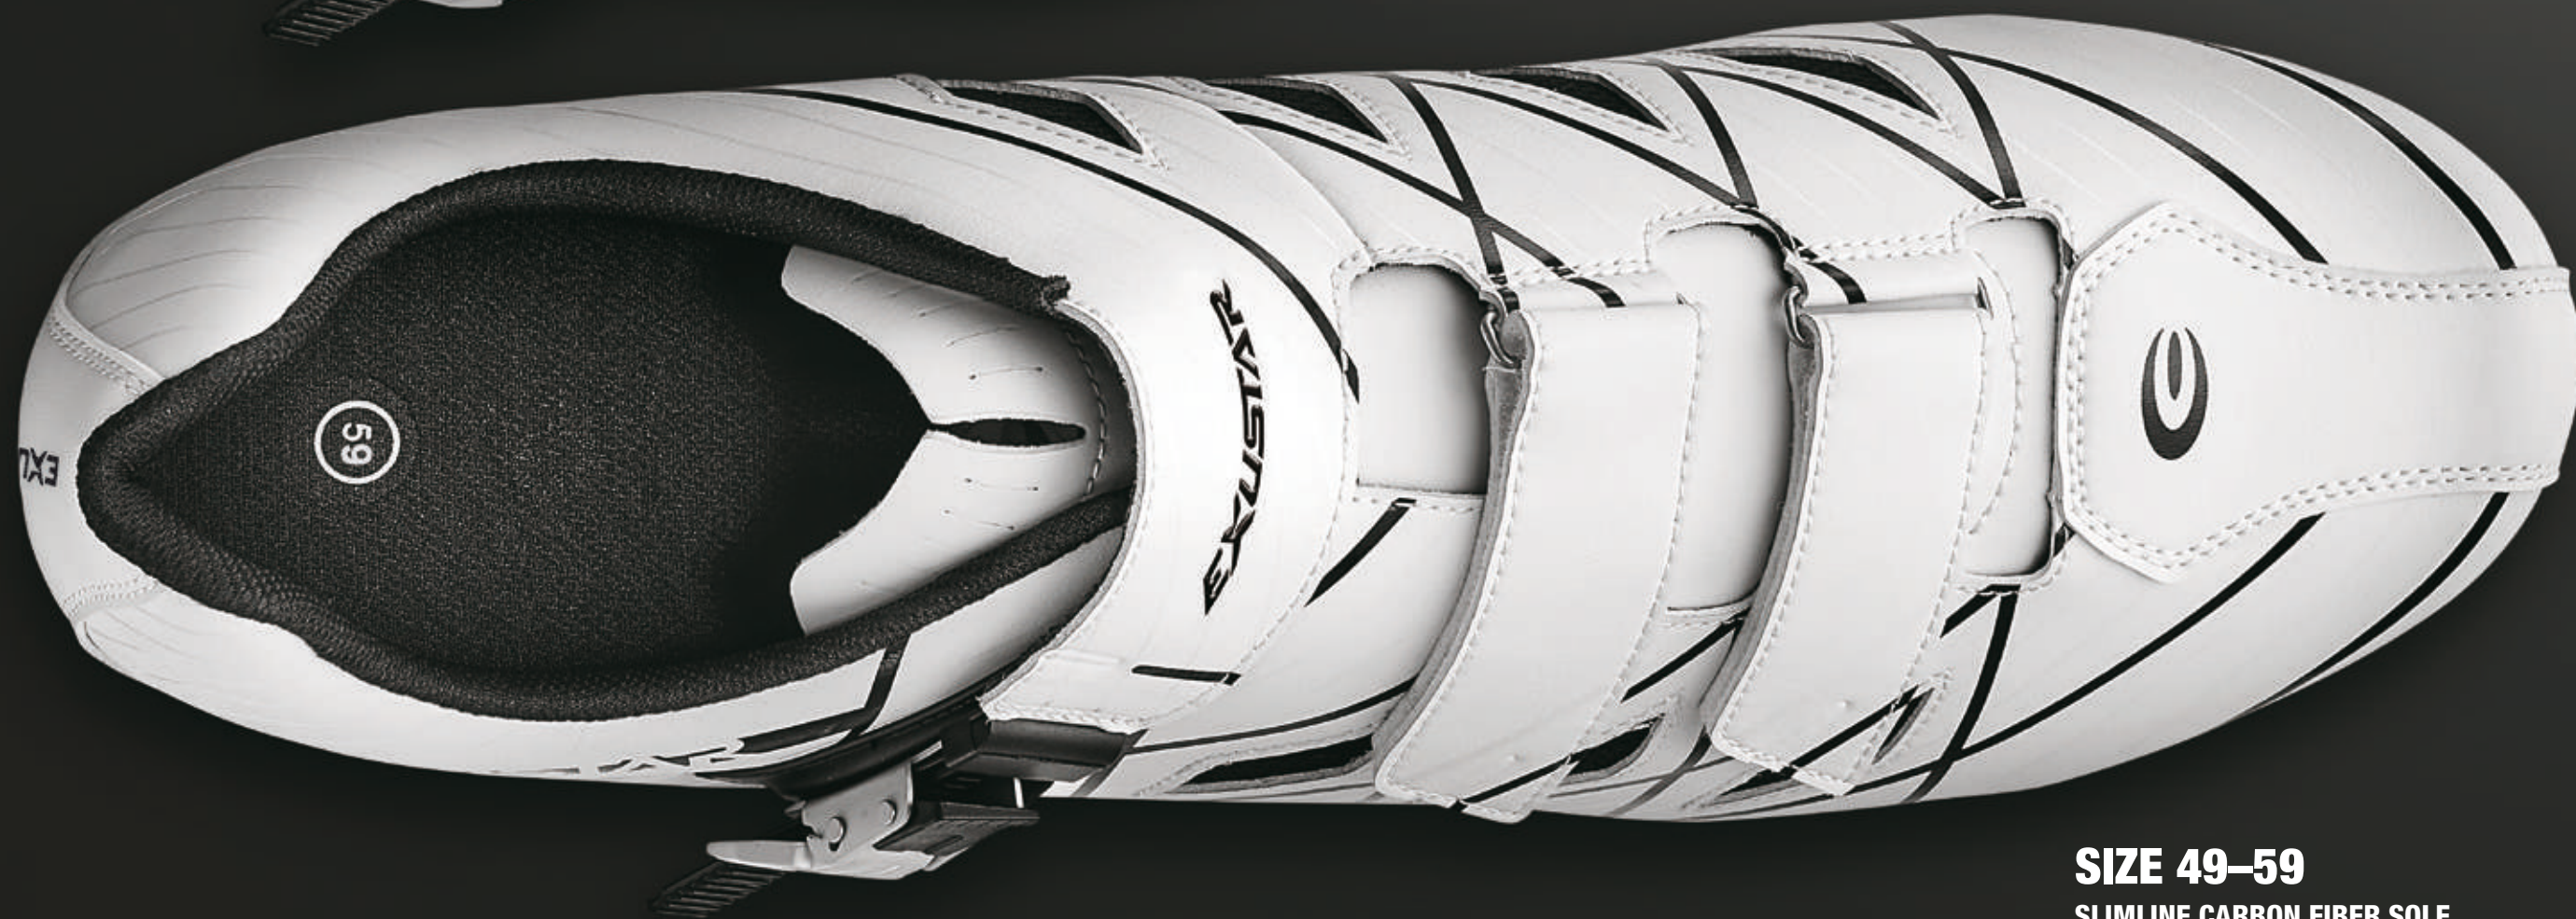

SIZE 49–59

SLIMLINE CARBON FIBER SOLE

An extremely rigid, lightweight full carbon fiber sole for high performance riding.



ROAD



E-OS2011 CARBON

Carbon fiber with rubber walk pad.



E-OS409

Nylon-fiber composite with TPU walk pad.



E-OS406

Nylon-fiber composite with TPU walk pad.



E-OS403

Nylon-fiber composite with TPU walk pad.

size:35-48



E-OS403 CARBON

Carbon fiber with TPU walk pad.

size:49-59



E-OS402

Nylon-fiber composite with TPU walk pad.



E-OS402K CARBON

Carbon-fiber composite with TPU walk pad.

MTB



E-OS303

Nylon-fiber composite with TPU walk pad.



E-OS303K CARBON

Carbon-fiber composite with TPU walk pad.



EMP132

E-OS802

Rubber, with screw-on cleat recess.



EMP131

E-OS102

Rubber, with screw-on cleat recess.



E-OS808

EVA with rubber tread.



E-OS807

EVA with rubber tread.



E-OS805

EVA with rubber tread, screw-on cleat recess cover.

MTB



E-OS3011 CARBON

Carbon fiber with rubber walk pad.



E-OS3010

Nylon-fiber composite with rubber walk pad.



E-OS304

Nylon-fiber composite with TPU walk pad.



E-OS306

Nylon-fiber composite with TPU walk pad.

SANDALS



EMP132

E-OS505

EVA with rubber tread, screw-on cleat recess cover.



EMP132

E-OS503

EVA with rubber tread, screw-on cleat recess cover.



EMP133

E-OS502

EVA with rubber tread, screw-on cleat recess cover.



E-OS7011

EVA with rubber tread.

BMX

INDOOR





E-CIV02 **SPORT**

TANK TOP

- Wide shoulder straps
- Scoop neck with racerback
- Stretchy, slim fitting
- Reflective logo

QUICK DRY

REFLECTIVE

AERO RACE FIT

Fabric Polyester and spandex with reflective logo.
Size S - M - L - XL

E-CIV02				
Measure	S	M	L	XL
Size/cm				
1/2 Bust	33	35	37	39
Length	55.5	58	60.5	63



E-CCIP01 **SPORT**

CASUAL TIGHTS

- Rear pocket
- Form-fitting comfort
- Reflective logo

QUICK DRY

REFLECTIVE

Fabric Nylon and spandex with reflective logo.
Color Gray.
Size S - M - L - XL

E-CCIP01				
Measure	S	M	L	XL
Size/cm				
1/2 Waist	33	35	37	39
Inner leg length	55	56	57	58
1/2 Leg opening	12.5	13	13.5	14